

Diamond blade



- application: concrete, brick, tile, masonry, stone, sandstone

YATO	∅A (mm)	∅B (mm)	R.P.M.max.	D (mm)	H (mm)
YT-6021	110	22.2	12000	2.2	5.3
YT-6022	115	22.2	12000	2.4	5.3
YT-6023	125	22.2	11000	2.6	5.3
YT-6024	180	22.2	8000	2.8	8.0
YT-6025	230	22.2	6500	3.1	5.3


Diamond blade

- application: ceramic tiles, thin natural stone tiles, glaze, glass, porcelain



YATO	∅A (mm)	∅B (mm)	R.P.M.max.	D (mm)	H (mm)
YT-5982	250	25.4	6100	2.6	10.0
YT-5983	300	25.4	5100	3.2	10.0
YT-5984	350	25.4	4300	3.2	10.0


Diamond blade



- application: ceramic, glaze, glass, porcelain

YATO	∅A (mm)	∅B (mm)	R.P.M.max.	D (mm)	H (mm)
YT-6011	110	22.2	12000	2.0	5.3
YT-6012	115	22.2	12000	2.1	5.3
YT-6013	125	22.2	11000	2.2	5.3
YT-6014	180	22.2	8000	2.5	5.3
YT-6015	230	22.2	6500	2.7	5.3
YT-6016	180	25.4	8000	2.2	5.3
YT-6017	200	25.4	8000	2.2	5.3


Diamond blade



- application: concrete, brick, tile, masonry, stone

YATO	∅A (mm)	∅B (mm)	R.P.M.max.	D (mm)	H (mm)
YT-60009	100	16.0	6500	2.7	8.0
YT-6001	110	22.2	12000	2.1	8.0
YT-6002	115	22.2	12000	2.1	8.0
YT-6003	125	22.2	11000	2.2	8.0
YT-6004	180	22.2	8000	2.5	8.0
YT-6005	230	22.2	6500	2.7	8.0


Diamond grinding cup wheel



- application: concrete, clinker, natural stone

YATO	∅A (mm)	∅B (mm)	R.P.M.max.	segment size
YT-6030	125	22.2	12200	5.0x7.5
YT-6031	180	22.2	8500	5.0x7.5
YT-6032	125	22.2	12200	4.5x20.0
YT-6033	180	22.2	8500	5.0x20.0


TCT circular saw blade for aluminium



- for cutting aluminium profiles, laminates, plexi, corian and other plastics
- negative angle of teeth

YATO	∅ (mm)	∅ d (mm)	R.P.M.max.	D (mm)	thickness of blade	T
YT-6091	200	30	8000	3.0	2.2	60
YT-6095	250	30	6000	3.0	2.2	100
YT-6097	300	30	5000	3.0	2.2	100
YT-6099	350	30	4500	3.2	2.5	100

TCT circular saw blade for wood



• for cutting wood and plastics

YATO	∅ (mm)	∅ d (mm)	R.P.M.max.	D (mm)	thickness of blade	T
YT-6065	200	30.0	8000	3.2	2.2	24
YT-6068	210	30.0	8000	3.2	2.2	60
YT-6077	300	30.0	5000	3.2	2.2	60
YT-6080	350	30.0	4500	3.5	2.5	28
YT-6081	350	30.0	4500	3.5	2.5	40
YT-6082	350	30.0	4500	3.5	2.5	54
YT-6083	350	30.0	4500	3.5	2.5	84
YT-6085	400	30.0	4000	3.8	2.8	32
YT-6086	400	30.0	4000	3.8	2.8	60

Inox cutting disc



• depressed center


YATO	∅ A (mm)	∅ B (mm)	D (mm)	R.P.M.max.
YT-5940	115	22	2.5	13200
YT-5941	115	22	3.2	13200
YT-5945	230	22	3.2	6500

Inox cutting disc




YATO	∅ A (mm)	∅ B (mm)	D (mm)	R.P.M.max.
YT-61009	100	16	1.0	13200
YT-6101	115	22	1.2	13200
YT-6102	115	22	2.5	13200
YT-6103	125	22	1.2	12200
YT-6106	180	22	2.5	8600
YT-6107	230	22	2.0	6500
YT-61091	355	25.4	3.5	4400

Metal cutting disc



YATO	∅ A (mm)	∅ B (mm)	D (mm)	R.P.M.max.
YT-5920	115	22	1.2	13200
YT-5921	115	22	2.5	13200
YT-5922	115	22	3.2	13200
YT-6110	125	22	3.2	12200
YT-6111	180	22	3.2	8600
YT-6112	230	22	3.2	6500

Metal grinding disc



• depressed center

YATO	∅ A (mm)	∅ B (mm)	D (mm)	R.P.M.max.
YT-6124	125	22	6.0	12200
YT-6138	180	22	8.0	8600
YT-6125	230	22	6.0	6500


Metal grinding disc



• depressed center

YATO	∅ A (mm)	∅ B (mm)	D (mm)	R.P.M.max.
YT-6115	115	22	3.2	13200
YT-6117	125	22	3.2	12200
YT-6119	180	22	3.2	8600
YT-6120	230	22	3.2	6500
YT-6122	305	25.4	4.0	5100

Stone cutting disc



• depressed center

YATO	∅A (mm)	∅B (mm)	D (mm)	R.P.M.max.
YT-6128	115	22	3.2	13200
YT-6129	125	22	3.2	12200
YT-6130	180	22	3.2	8600
YT-6131	230	22	3.2	6500


Hand saw for wood

Mn 65 7T inch

1.6 mm 0.9 mm HRC 50-54



YATO	L(mm)
YT-3101	400
YT-3102	450
YT-3103	500



Back saw

300 mm Mn 65 HRC 50-54 1.2 mm 0.8 mm

12T inch



YATO	L(mm)
YT-3130	300

Plastic mitre box with doretail saw

ABS Mn 65 12T inch 300x140 x70mm

350 mm 1.2 mm 0.8 mm

HRC 50-54



YATO	L(mm)
YT-3150	350

Compass saw

1.6 mm 0.9 mm HRC 50-54 300 mm Mn 65 7T inch



YATO	L(mm)
YT-3133	300

Wallboard saw

2.0 mm 1.5 mm HRC 50-54 150 mm Mn 65 7T inch




YATO	L(mm)
YT-3134	150

Bow saw

HCS 65

FOR WOOD



• PVC handle with TPR grip, foam sleeve on frame

YATO	L(mm)
YT-3201	450
YT-3202	530
YT-3203	610
YT-3204	760
YT-3206	910

Heavy duty hacksaw frame



YATO L(mm) 24 TPI FOR METAL DO METALU 300 mm BI-METAL

YATO	L(mm)
YT-3161	300

Junior Hacksaw



YATO	L(mm)
YT-31631	150

Router bit set



±0.08 mm

24 PCS

Ø 8 mm

TUNGSTEN CARBIDE YG-6X

Router bit parameter												
Shank diameter [mm]	8	8	8	8	8	8	8	8	8	8	8	8
Length [mm]	42.0	47.0	47.0	43.5	50.0	51.5	51.0	52.0	58.0	51.5	58.0	56.5
Router bit diameter [mm]	12.7	12.7	9.5	12.7	12.7	9.5	12.7	16.0	6.35	6.35	9.5	12.7
Cutting edge length [mm]	12.7	14.8	11.6	13.0	12.5	20.0	20.0	9.5	19.5	20.0	24.5	25.0
Curvature radius [mm]	-	-	-	-	-	4.75	6.35	-	-	-	-	-
Bearing diameter [mm]	-	-	-	-	-	-	-	12.7	-	-	-	-
Angle [°]	-	15	10	-	45	-	-	15	-	-	-	-

Router bit parameter												
Shank diameter [mm]	8	8	8	8	8	8	8	8	8	8	8	8
Length [mm]	52.0	65.0	51.0	51.5	53.5	57.5	50.5	53.5	52.0	55.0	50.0	54.0
Router bit diameter [mm]	19.0	12.7	19.0	22.0	26.0	32.0	22.0	28.5	27.0	30.0	32.0	32.0
Cutting edge length [mm]	20.4	25.0	9.5	10.0	11.5	16.5	9.72	13.5	12.3	14.0	6.35	12.7
Curvature radius [mm]	-	-	3.2	4.76	6.35	9.5	6.35	9.5	4.0	-	-	-
Bearing diameter [mm]	-	12.7	-	12.7	12.7	12.7	9.5	9.5	9.5	12.7	12.7	12.7
Angle [°]	-	-	-	-	-	-	-	-	-	45	-	-



ALUMINUM CASE & COLOR SLEEVE



ADDITIONAL TIP

Hacksaw frame



300 mm

BI-METAL

24 TPI

FOR METAL DO METALU

YATO	L(mm)	
YT-3163	300	

Bow saw

FOR WOOD AND METAL

2 FUNCTION

HCS 65



- PVC handle with TPR grip, foam sleeve on frame

YATO	L(mm)	
YT-3200	300	

Router bit set




TUNGSTEN
CARBIDE
YG-6X

±0.08
mm

Ø8mm

35
PCS

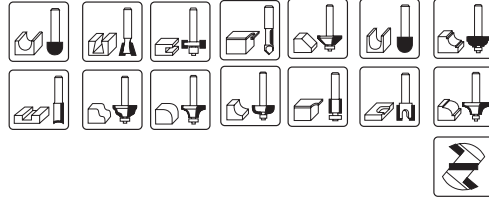

Router bit parameter																		
Shank diameter [mm]	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Length [mm]	43.0	38.0	38.0	50.5	42.0	43.5	51.5	49.5	51.5	58.0	58.5	56.5	52.0	58	53.5	66.0	53.0	65.0
Router bit diameter [mm]	6.35	12.7	12.7	12.7	12.7	14.3	14.3	3.175	6.35	9.5	12.7	12.7	19.0	6.35	9.5	9.5	12.7	12.7
Cutting edge length [mm]	6.0	9.5	9.5	18.0	12.7	13.0	12.3	13.0	20.0	24.5	20.3	25.0	20.4	19.5	15.0	26.0	15	25.0
Curvature radius [mm]	3.175	6.35	-	6.35	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bearing diameter [mm]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	9.5	9.5	12.7	12.7
Angle [°]	-	-	45	-	-	10	14	-	-	-	-	-	-	-	-	-	-	-

Router bit parameter																	
Shank diameter [mm]	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	-
Length [mm]	65.5	55.0	51.0	55.0	50.0	52.5	54.0	55.5	60.0	60.0	56.0	60.0	52.5	58.0	53.5	57.5	61.0
Router bit diameter [mm]	19.0	30.0	26.0	32.0	32.0	32.0	32.0	32.0	32.0	38.0	32.0	38.0	26.0	38.0	26.0	32.0	38.0
Cutting edge length [mm]	26.0	14.0	9.7	13.3	6.35	8.0	9.5	15.0	18.5	20.0	16.0	19.0	12.5	17.8	11.5	16.5	20.8
Curvature radius [mm]	-	-	6.35	9.5	-	-	-	8.0	4.76	12.7	4.76	6.35	3.175	6.35	6.35	9.5	12.7
Bearing diameter [mm]	19.0	12.7	12.7	12.7	12.7	12.7	12.7	9.5	12.7	9.5	9.5	9.5	9.5	9.5	12.7	12.7	12.7
Angle [°]	-	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

YATO
YT-6803

Blade for wet wood



YATO	L(mm)
YT-3230	300
YT-3231	450
YT-3232	530
YT-3233	610
YT-3234	760
YT-3235	910

HCS 65
WET WOOD

Blade for dry wood



YATO	L(mm)
YT-3220	300
YT-3221	450
YT-3222	530
YT-3223	610
YT-3224	760
YT-3225	910

HCS 65
DRY WOOD

Double edge trimmer



- one side or both sides cutting

YATO	
YT-5710	

13-25 mm

ONE SIDE CUTTING
BOTH SIDE CUTTING

SK5



Hacksaw blade

300 mm 12 mm 24 TPI



- material: flexible carbon steel

YATO	L(mm)	W(mm)	TPI	
YT-3460	300	12	24	

BI-METAL
M2+6150

YATO	L(mm)	W(mm)	TPI	
YT-3461	300	12	24	

BI-METAL
M2+Co8%

YATO	L(mm)	W(mm)	TPI	
YT-3462	300	12	24	

Cup brush with shaft



YATO	∅ (mm)	R.P.M.max.	
YT-4752	75	6000	



YATO	∅ (mm)	R.P.M.max.	
YT-4755	20	6000	
	50	7500	
	50	4500	



Steel wire brush set

3 PCS 180 mm NYLON BRASS MOSIADZ STAINLESS STEEL STAL NIEROZOWNA



YATO	ROWS	
YT-6351	3X7	

Steel wire brush

ZINC PLATED WIRES



YATO	ROWS	
YT-6353	3	
YT-6354	4	
YT-6355	5	
YT-6356	6	

Circular brush with shaft



YATO	∅ (mm)	R.P.M.max.
YT-4757	100	4500



YATO	∅ (mm)	R.P.M.max.
YT-4758	100	4500



YATO	∅ (mm)	R.P.M.max.
YT-4759	75	20000



Circular brush

M14

YATO	∅ (mm)	R.P.M.max.
YT-4761	100	12500



M14

YATO	∅ (mm)	R.P.M.max.
YT-4763	100	12500



INOX M14

YATO	∅ (mm)	R.P.M.max.
YT-4764	125	10000



Cup brush

M14

YATO	∅ (mm)	R.P.M.max.
YT-4766	100	8500



M14 INOX

YATO	∅ (mm)	R.P.M.max.
YT-4768	75	11000



M14

YATO	∅ (mm)	R.P.M.max.
YT-4767	60	12500



M14

YATO	∅ (mm)	R.P.M.max.
YT-4769	100	8500



Steel file

T12
STEEL

1# bastard cut
2# standard cut / second cut
3# smooth cut



YATO	#	L (mm)
YT-6180	2	150
YT-6185	2	200
YT-6223	1	250
YT-6228	2	250
YT-6233	3	250
YT-6190	2	300



YATO	#	L (mm)
YT-6181	2	150
YT-6186	2	200
YT-6224	1	250
YT-6229	2	250
YT-6191	2	300



YATO	#	L (mm)
YT-6182	2	150
YT-6187	2	200
YT-6225	1	250
YT-6230	2	250
YT-6234	3	250
YT-6192	2	300



YATO	#	L (mm)
YT-6183	2	150
YT-6188	2	200
YT-6226	1	250
YT-6231	2	250
YT-6235	3	250
YT-6193	2	300



YATO	#	L (mm)
YT-6184	2	150
YT-6189	2	200
YT-6227	1	250
YT-6232	2	250
YT-6236	3	250
YT-6194	2	300

Steel file set

250
mm

1# bastard cut
2# standard cut / second cut
3# smooth cut

T12
STEEL

#2

#2

#2

3
PCS

YATO	#
YT-6237	970



250
mm

T12
STEEL

5
PCS

#1

#1 #2

#1

#1

YATO	#
YT-6238	1500



250
mm

T12
STEEL

5
PCS

#3

#3

#3

#3

#3

YATO	#
YT-6239	1500



Wood rasp set

3
PCS

#45

#45

#45

250
mm

YATO	#	#
YT-6222	45	470



Wood rasp

250 mm # 45

YATO	#	1	
YT-6219	45	175	

250 mm # 45

YATO	#	1	
YT-6220	45	210	

250 mm # 45

YATO	#	1	
YT-6221	45	210	

Diamond needle file

Diamond needle half-round file

YATO	grit	coating length	mm
YT-6141	150	50	3x140
YT-6148	150	50	4x160
YT-6153	150	70	5x180

Diamond needle round file

YATO	grit	coating length	mm
YT-6142	150	50	3x140
YT-6149	150	50	4x160
YT-6154	150	70	5x180

Diamond needle flat file

YATO	grit	coating length	mm
YT-6140	150	50	3x140
YT-6147	150	50	4x160
YT-6152	150	70	5x180

Diamond needle file set

3 PCS

YATO	size (mm)	coating length	
YT-6143	3x140	50	
YT-6150	4x150	50	
YT-6155	5x180	70	

Needle file set

6 PCS

YATO	coating length	mm	
YT-6160	65	3x140	
YT-6161	75	4x160	
YT-6162	85	5x180	

10 PCS


YATO	coating length	mm	
YT-6163	65	3x140	
YT-6164	75	4x160	
YT-6165	85	5x180	





Diamond needle file set

5 PCS

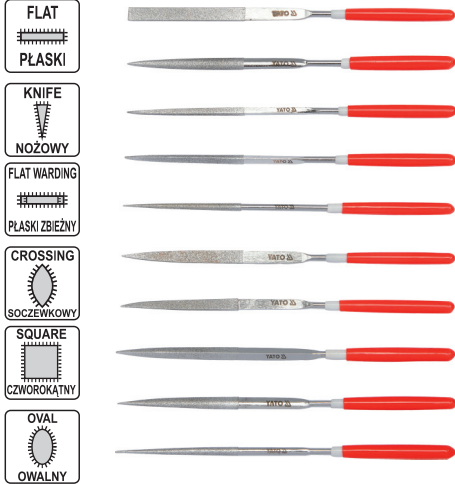
YATO	size (mm)	coating length	
YT-6156	5x180	70	





Diamond needle flat file

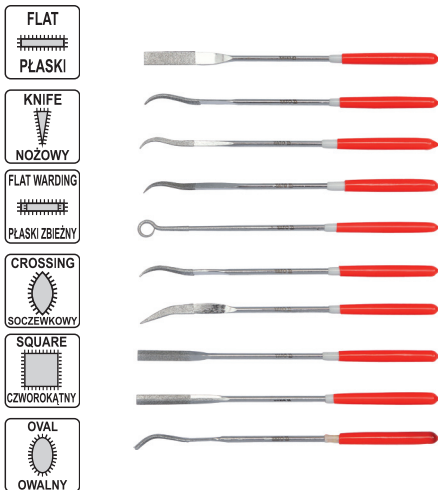

-  TRÓJKĄTNY
-  BARRETTE
TRÓJKĄTNY DOLNY
-  OKRĄGŁY
-  PÓŁOKRĄGŁY
- 10**
- PCS**


YATO	mm	coating length	
YT-6144	3x140	50	







-  TRÓJKĄTNY
-  BARRETTE
TRÓJKĄTNY DOLNY
-  OKRĄGŁY
-  PÓŁOKRĄGŁY
- 10**
- PCS**

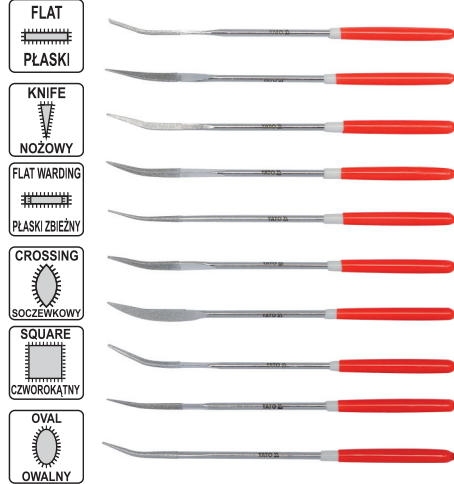
YATO	mm	coating length	
YT-6145	3x140	50	





Diamond needle flat file

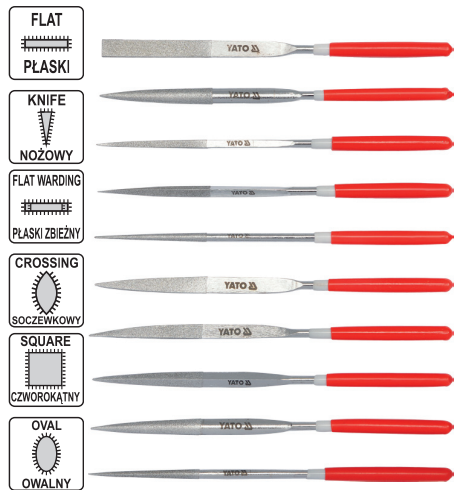

-  TRÓJKĄTNY
-  BARRETTE
TRÓJKĄTNY DOLNY
-  OKRĄGŁY
-  PÓŁOKRĄGŁY
- 10**
- PCS**

YATO	mm	coating length	
YT-6146	3x140	30	



-  TRÓJKĄTNY
-  BARRETTE
TRÓJKĄTNY DOLNY
-  OKRĄGŁY
-  PÓŁOKRĄGŁY
- 10**
- PCS**

YATO	mm	coating length	
YT-6151	4x140	50	

Flap disc - regular shape

V max.
80
m/s



72P

- application: metal
- abrasive: aluminium oxide
- bond: synthetic resin
- backing: fibreglass

YATO	grit	A(mm)	B(mm)	R.P.M.max.
YT-83251	36	115	22.4	13200
YT-83252	40	115	22.4	13200
YT-83253	60	115	22.4	13200
YT-83254	80	115	22.4	13200
YT-83255	100	115	22.4	13200
YT-83256	120	115	22.4	13200
YT-83271	36	125	22.4	12200
YT-83272	40	125	22.4	12200
YT-83273	60	125	22.4	12200
YT-83274	80	125	22.4	12200
YT-83275	100	125	22.4	12200
YT-83276	120	125	22.4	12200

Flap disc - centre depressed

V max.
80
m/s





72P

- application: metal
- abrasive: aluminium oxide
- bond: synthetic resin
- backing: fibreglass

YATO	grit	A(mm)	B(mm)	R.P.M.max.
YT-83281	36	115	22.4	13200
YT-83282	40	115	22.4	13200
YT-83283	60	115	22.4	13200
YT-83284	80	115	22.4	13200
YT-83285	100	115	22.4	13200
YT-83286	120	115	22.4	13200
YT-83291	36	125	22.4	12200
YT-83292	40	125	22.4	12200
YT-83293	60	125	22.4	12200
YT-83294	80	125	22.4	12200
YT-83295	100	125	22.4	12200
YT-83296	120	125	22.4	12200

Flap wheels

68P



- application: metal
- abrasive: aluminium oxide
- bond: synthetic resin

YATO	grit	A (mm)	B (mm)	ØC (mm)	D (mm)	R.P.M.max.
YT-83351	40	40	20	6	30	18000
YT-83352	60	40	20	6	30	18000
YT-83353	80	40	20	6	30	18000
YT-83354	100	40	20	6	30	18000
YT-83355	120	40	20	6	30	18000
YT-83356	150	40	20	6	30	18000

110P

YATO	grit	A (mm)	B (mm)	ØC (mm)	D (mm)	R.P.M.max.
YT-83371	40	80	30	6	35	12000
YT-83372	60	80	30	6	35	12000
YT-83373	80	80	30	6	35	12000
YT-83374	100	80	30	6	35	12000
YT-83375	120	80	30	6	35	12000
YT-83376	150	80	30	6	35	12000

70P

YATO	grit	A (mm)	B (mm)	ØC (mm)	D (mm)	R.P.M.max.
YT-83361	40	60	30	6	35	15000
YT-83362	60	60	30	6	35	15000
YT-83363	80	60	30	6	35	15000
YT-83364	100	60	30	6	35	15000
YT-83365	120	60	30	6	35	15000
YT-83366	150	60	30	6	35	15000

110P


YATO	grit	A (mm)	B (mm)	ØC (mm)	D (mm)	R.P.M.max.
YT-83381	40	80	40	6	38	12000
YT-83382	60	80	40	6	38	12000
YT-83383	80	80	40	6	38	12000
YT-83384	100	80	40	6	38	12000
YT-83385	120	80	40	6	38	12000
YT-83386	150	80	40	6	38	12000

Sand paper



- application: metal, wood
- abrasive: aluminium oxide
- bond: semi-resin
- backing: J
- coating: close

YATO	grit	size (mm)	
YT-83160	36	230x280	
YT-83161	40	230x280	
YT-83162	60	230x280	
YT-83163	80	230x280	
YT-83164	100	230x280	
YT-83165	120	230x280	
YT-83166	150	230x280	
YT-83167	180	230x280	
YT-83168	220	230x280	
YT-83169	240	230x280	



- application: paint, lacquer, filler, wood
- abrasive: aluminium oxide
- bond: synthetic resin
- backing: C
- coating: semi-open

YATO	grit	size (mm)	
YT-8350	40	230x280	
YT-8351	60	230x280	
YT-8352	80	230x280	
YT-8353	100	230x280	
YT-8354	120	230x280	
YT-8355	150	230x280	
YT-8356	180	230x280	
YT-8357	220	230x280	
YT-8358	240	230x280	

Abrasive disc

5
PCS


HOOK
FASTENER
RZEP



- application: metal, wood
- abrasive: aluminium oxide
- bond: synthetic resin
- backing: C
- coating: semi-open

YATO	grit	∅ (mm)	
YT-83430	36	125	
YT-83431	40	125	
YT-83432	60	125	
YT-83433	80	125	
YT-83434	100	125	
YT-83435	120	125	
YT-83436	150	125	
YT-8347	180	125	
YT-83438	220	125	

Sand paper



- application: paint, lacquer, filler
- abrasive: silicon carbide
- bond: synthetic resin
- backing: C
- coating: closed

YATO	grit	size (mm)	
YT-8400	60	230x280	
YT-8401	80	230x280	
YT-8402	100	230x280	
YT-8403	120	230x280	
YT-8404	150	230x280	
YT-8405	180	230x280	
YT-8406	220	230x280	
YT-8407	240	230x280	
YT-8408	280	230x280	
YT-8409	320	230x280	
YT-8410	360	230x280	
YT-8411	400	230x280	
YT-8412	500	230x280	
YT-8413	600	230x280	
YT-8414	800	230x280	
YT-8415	1000	230x280	
YT-8416	1200	230x280	
YT-8417	1500	230x280	
YT-8418	2000	230x280	

Abrasive disc

5
PCS



HOOK
FASTENER
RZEP



- application: metal, wood
- abrasive: aluminium oxide
- bond: synthetic resin
- backing: C
- coating: semi-open

YATO	grit	∅ (mm)	
YT-83450	36	125	
YT-83451	40	125	
YT-83452	60	125	
YT-83453	80	125	
YT-83454	100	125	
YT-83455	120	125	
YT-83456	150	125	
YT-83457	180	125	
YT-83458	220	125	

Industrial wipers



Strong & Won't Tear
Whether is Wet or Dry. Reusable



High Capacity
400 Sheets (Twice Cotton Rags Capacity)



Low Lint
Minimize Contamination



1 Box = 2x
Greenwipes™



Chemical Resistant
Won't break apart when use with Solvent



Environmental Friendly
Save Our Planet



High Absorbency
Absorb 3x More than Rags / Cloths



Recyclable
All Greenwipes™ Are Recyclable Too

"SUITABLE FOR ALL WIPING APPLICATION"
"PERFORMS BETTER & MORE ECONOMICAL THAN RAGS"



400 sheets (Twice Cotton Rags Capacity)
400 sheets / size(cm) : 30.5 x 30.5

Excellent all round quality wiping cloth, high performance wipes that are highly productive, cost effective and space efficient.

Ideal for wide range of applications. Can be used wet, dry or in between. Exceptional strength & durability. Soft, pleasant feel that's uniquely their own.

Highly Absorbent	Box Dispenser	Reduce Reuse Recycle	Lint Free	Cost Savings	Versatile Durable Stronger
------------------	---------------	----------------------	-----------	--------------	----------------------------

SUREWIPE



order code :
eu 109



order code :
eu 108

YATO	Interfold	
SW-1108	interfold pack	
SW-1109	vacuum pack	