
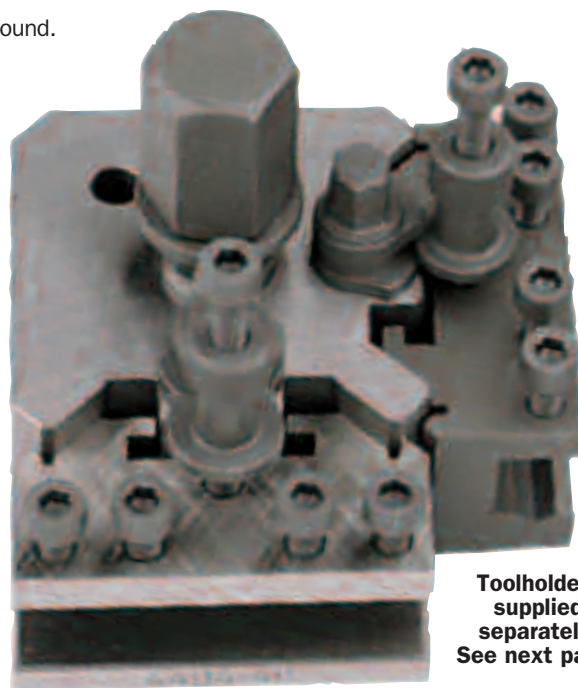


Made of alloy case steel. All working surfaces are hardened and precision ground.

Toolposts Type T.00 - T.0


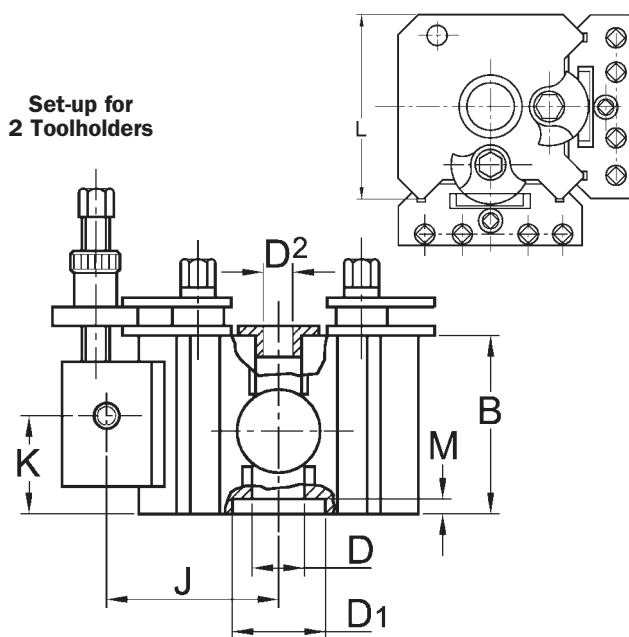


Toolholders supplied separately. See next page.

Type	No. of Toolholders	Lathe Capacity	B	D1 Dia.	M Depth	D	E	G	F	H1 Max	H1 Min.
T.00M	2	Up to 89mm	37.0	-	-	11.2	-	10	11	27	17
T.0	3	Up to 114mm	51.0	22.22	5.0	19.0	124	13	13	36.5	20.5

Type	Bar dia. d Max.	H Max.	H Min.	Taper	J	K Max.	K Min.	L	D2	Weight each	Order Code
T.00M	11.0	22.5	12.5	-	-	-	-	58.0	-	0.90kg	IND-445
T.0	16.0	32.0	16.0	1	52.5	28.5	16.0	73.0	16.0	2.00kg	-4800K -4820K

Toolposts Type T.1 - T.3

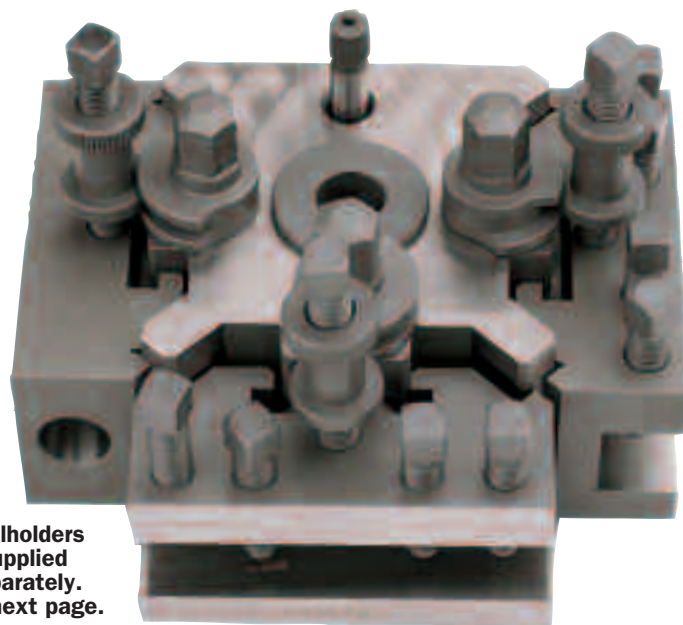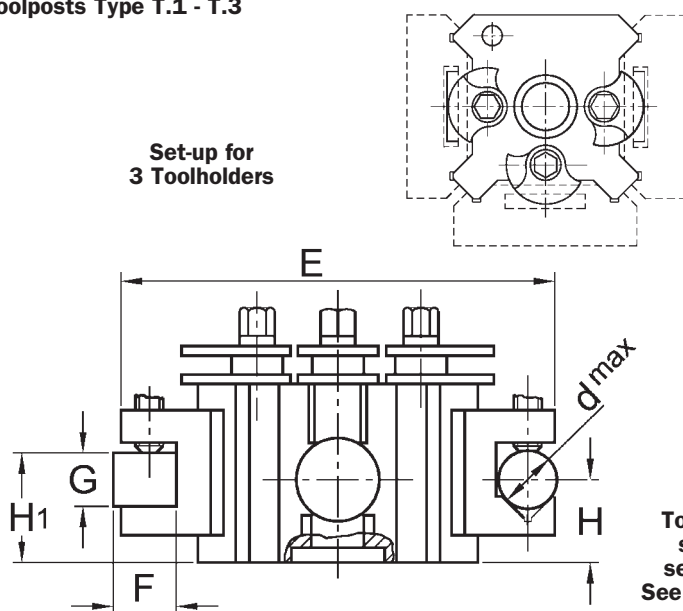

Toolholders supplied separately. See next page.


Type	No. of Toolholders	Lathe Capacity	B	D1 Dia.	M Depth	D	E	G	F	H1 Max	H1 Min.
T.1	3	114 to 127mm	63.5	31.75	6.5	19.0	124	19	13	46	30
T.1X	3	114 to 127mm	73.0	31.75	6.5	19.0	124	19	13	57	35
T.2	3	127 to 203mm	71.5	44.45	8.0	25.5	159	19	19	54	36.5
T.2T	3	127 to 203mm	76.0	44.45	8.0	25.5	168	25.5	25.5	58.5	39.5
T.3	3	203 to 292mm	92.0	50.80	9.5	25.5	203	31.5	22.5	73	51

Type	Bar dia. d Max.	H Max.	H Min.	Taper	J	K Max.	K Min.	L	D2	Weight each	Order Code
T.1	16.0	44.5	25.5	1	52.5	41.0	22.0	73.0	16.0	2.30kg	-4830K
T.1X	16.0	54.0	32.0	1 & 2	52.5	51.0	28.5	73.0	16.0	2.60kg	-4840K
T.2	19.0	46.0	24.0	2	65.0	47.5	27.0	98.5	16.0	4.60kg	-4850K
T.2T	19.0	50.0	24.0	2 & 3	70.0	47.5	27.0	106.5	16.0	5.80kg	-4860K
T.3	25.5	51.0	28.5	3	85.5	58.5	36.5	125.5	22.0	10.8kg	-4870K

INDEXA



**Toolholders for Quick Change
Toolposts**

Standard Type

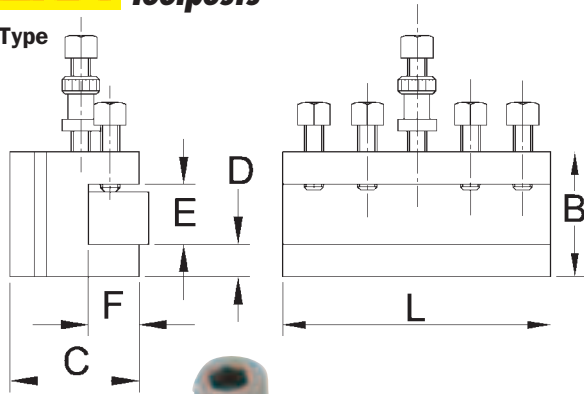


Used On	L (mm)	B	C	D	E	F	Order Code IND-445
T.00	58.0	27.0	28.0	7.0	13.0	11	-5010K
T.0	73.0	35.0	32.0	8.0	16.0	14	-5020K
T.1	73.0	44.5	32.0	11.0	22.0	14	-5030K
T.2	98.5	50.0	40.0	12.0	22.0	19	-5040K
T.2T	98.5	57.0	40.0	14.0	28.5	19	-5050K
T.3	124.0	70.0	48.5	17.5	35.0	23	-5060K

Parting Off
Type

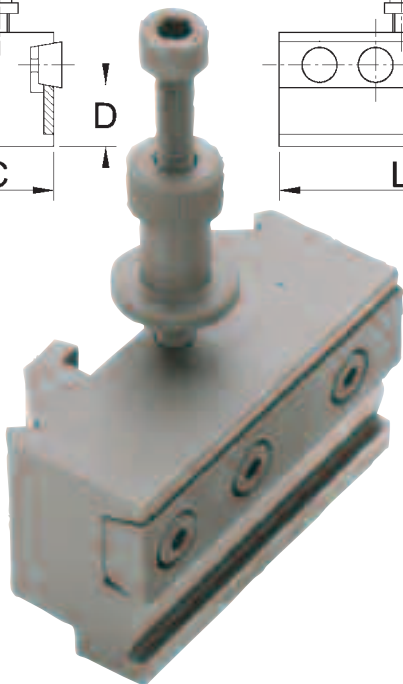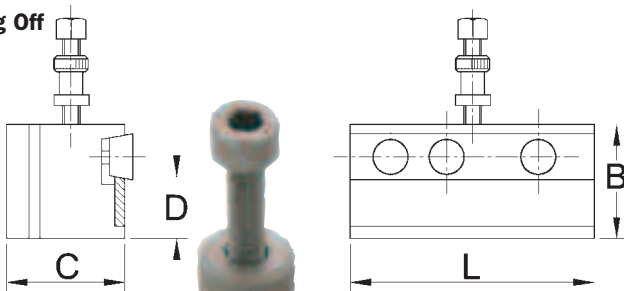

Used On	L (mm)	B	C	D	Order Code IND-445
T.0/T.1	73.0	47.5	32.0	27.0	-5370K
T.2	98.5	57.0	39.5	33.5	-5380K

Vee Type

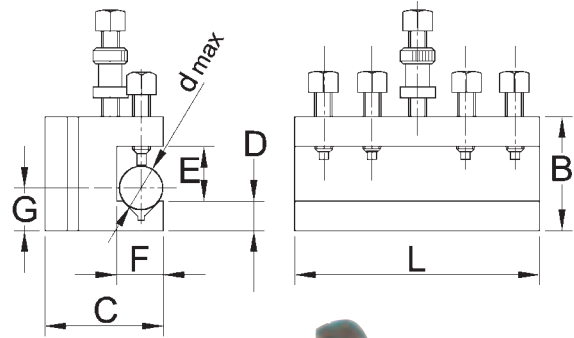

Used On	L (mm)	B	C	D	E	F	G	d Max	Order Code IND-445
T.00	58.0	27.0	28.0	8.0	13.0	11	13.5	11.0	-5110K
T.0	73.0	35.0	32.0	8.0	16.0	14	16.0	16.0	-5120K
T.1	73.0	44.5	32.0	16.0	17.0	14	24.0	16.0	-5130K
T.2	98.5	50.0	40.0	14.0	22.0	19	24.0	19.0	-5140K
T.2T	98.5	57.0	40.0	14.0	28.5	19	24.0	19.0	-5150K
T.3	124.0	70.0	48.5	17.5	35.0	23	28.5	25.5	-5160K

Industrial Lathe Carriers

Available with straight or bent tail. Manufactured from high grade, malleable cast iron with high tensile strength. Smooth action square head clamping screw.



Straight

Type	Capacity	Weight each	Order Code IND-445
Straight	12.5mm	0.10kg	-9000K
	19.0mm	0.15kg	-9010K
	25.0mm	0.30kg	-9020K
	38.0mm	0.70kg	-9040K
	50.0mm	1.50kg	-9060K



Bent

Type	Capacity	Weight each	Order Code IND-445
Bent	12.5mm	0.10kg	-9200K
	19.0mm	0.15kg	-9210K
	25.0mm	0.30kg	-9220K
	38.0mm	0.70kg	-9240K
	50.0mm	1.50kg	-9260K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR