


INDEXA



**Toolholders for Quick Change
Toolposts**

Standard Type

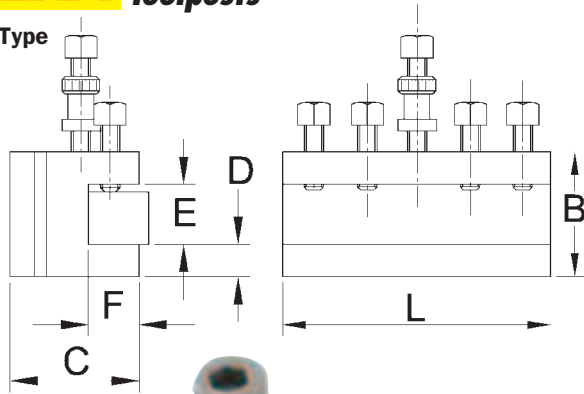


Used On	L (mm)	B	C	D	E	F	Order Code IND-445
T.00	58.0	27.0	28.0	7.0	13.0	11	-5010K
T.0	73.0	35.0	32.0	8.0	16.0	14	-5020K
T.1	73.0	44.5	32.0	11.0	22.0	14	-5030K
T.2	98.5	50.0	40.0	12.0	22.0	19	-5040K
T.2T	98.5	57.0	40.0	14.0	28.5	19	-5050K
T.3	124.0	70.0	48.5	17.5	35.0	23	-5060K

Parting Off
Type

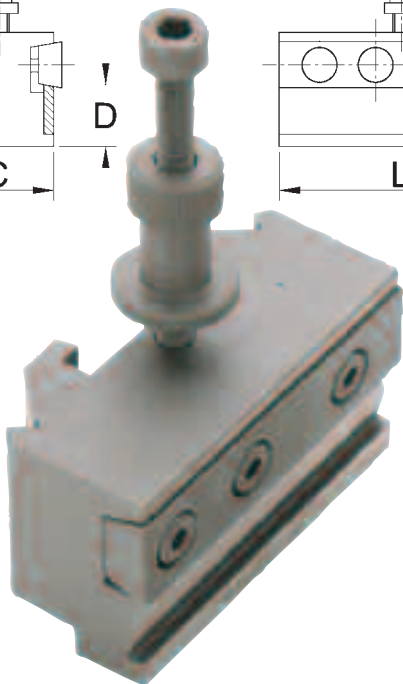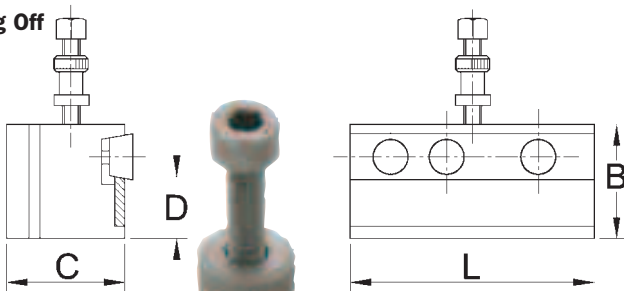

Used On	L (mm)	B	C	D	Order Code IND-445
T.0/T.1	73.0	47.5	32.0	27.0	-5370K
T.2	98.5	57.0	39.5	33.5	-5380K

Vee Type

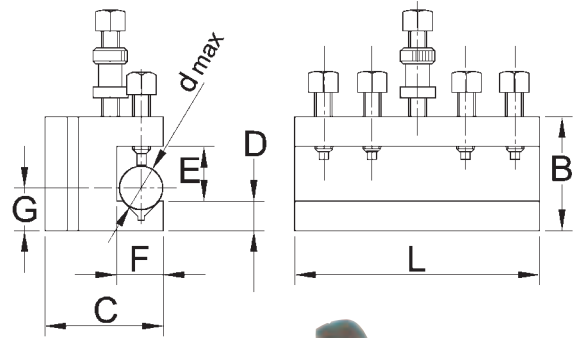

Used On	L (mm)	B	C	D	E	F	G	d Max	Order Code IND-445
T.00	58.0	27.0	28.0	8.0	13.0	11	13.5	11.0	-5110K
T.0	73.0	35.0	32.0	8.0	16.0	14	16.0	16.0	-5120K
T.1	73.0	44.5	32.0	16.0	17.0	14	24.0	16.0	-5130K
T.2	98.5	50.0	40.0	14.0	22.0	19	24.0	19.0	-5140K
T.2T	98.5	57.0	40.0	14.0	28.5	19	24.0	19.0	-5150K
T.3	124.0	70.0	48.5	17.5	35.0	23	28.5	25.5	-5160K

Industrial Lathe Carriers

Available with straight or bent tail. Manufactured from high grade, malleable cast iron with high tensile strength. Smooth action square head clamping screw.



Straight

Type	Capacity	Weight each	Order Code IND-445
Straight	12.5mm	0.10kg	-9000K
	19.0mm	0.15kg	-9010K
	25.0mm	0.30kg	-9020K
	38.0mm	0.70kg	-9040K
	50.0mm	1.50kg	-9060K



Bent

Type	Capacity	Weight each	Order Code IND-445
Bent	12.5mm	0.10kg	-9200K
	19.0mm	0.15kg	-9210K
	25.0mm	0.30kg	-9220K
	38.0mm	0.70kg	-9240K
	50.0mm	1.50kg	-9260K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR