



Ratchet crimping pliers

220 mm
20-8 (AWG)
1.5-10 mm² (DIN)

SLIDING CARD



- application: for non-insulated terminals
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2247	U	220	1.5-10mm ²	5/30

Ratchet crimping pliers

RG 58 RG 59 RG 62 RG 6



- application: for non-insulated terminals
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	
YT-2248	O	220	5/30

Ratchet crimping pliers

195 mm CAT.5 RJ45 HRC 42-48



- widely used for cutting, stripping, crimping fit for 4p, 6P, 8P network cable use

YATO	L (mm)	
YT-2242	195	10/60

195 mm CAT.5 RJ11 RJ12 RJ22 RJ45 HRC 42-48



- widely used for cutting, stripping, crimping fit for 4p, 6P, 8P network cable use

YATO	L (mm)	
YT-2244	195	10/60

Ratchet crimping pliers

CAT.5 HRC 42-48 SK5



- widely used for cutting, stripping, crimping fit for 4p, 6P, 8P network cable use

YATO	L (mm)	
YT-2243	200	8/48

215 mm RJ12 RJ11 HRC 42-48 CAT.5



SK5 RJ45

- widely used for cutting, stripping, crimping fit for 4p, 6P, 8P network cable use

YATO	L (mm)	
YT-2242	215	10/60

RQuick interchangeable ratch crimper set

260 mm 22-10 (AWG) 0.5-6.0 mm² (DIN)

6 PCS 260 mm RG 6 RG 58

20-10 (AWG) 0.5-6 mm² (DIN)

22-10 (AWG) 0.5-6 mm² (DIN)

RG 59 RG 62

20-8 (AWG) 1.5-10 mm² (DIN)

22-12 (AWG) 0.5-4 mm² (DIN)



BMC & COLOR SLEEVE



QUICK RELEASE

SZYBKO-ZŁĄCZE



- with 5 sets of jaws, multi-purpose using for various terminals

YATO	L (mm)	crimping range	
YT-2245	260	0.5-10mm ²	10

Ratchet crimping pliers

220 mm
22-10 (AWG)
0.5-6 mm² (DIN)



- application: for insulated terminals
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2246		220	0.5-6mm ²	5/30

220 mm
22-12 (AWG)
0.5-4 mm² (DIN)



- application: crimping for pin terminal insulated or non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2249		220	0.5-4mm ²	5/30

220 mm
20-18 (AWG)
0.5-1.5 mm² (DIN)
16-14 (AWG)
1.0-2.5 mm² (DIN)
18-16 (AWG)
4.0-6.0 mm² (DIN)



- application: crimping for pin terminal insulated or non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2250		220	0.5-6mm ²	5/30

250 mm
22-10 (AWG)
0.5-6 mm² (DIN)



- application: for insulated terminals and colour code nests

YATO	crimping shape	L (mm)	crimping range	
YT-2251		250	0.5-6mm ²	5/30

Ratchet crimping pliers

195 mm HRC 44-47
22-14 (AWG)
0.5-2.5 mm² (DIN)



- application: for insulated terminals and colour code nests

YATO	crimping shape	L (mm)	crimping range	
YT-2283		195	0.5-2.5mm ²	6/36

250 mm HRC 44-47
22-8 (AWG)
0.5-10 mm² (DIN)



- application: for non-insulated terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2284		250	0.5-10mm ²	6/36

180 mm HRC 44-47



- application: cord end sleeve from 0.2-6mm²

YATO	crimping shape	L (mm)	crimping range	
YT-2240		180	0.2-6mm ²	6/36

230 mm HRC 44-48 CrMo 4140
22-10 (AWG)
0.5-6.0 mm² (DIN)



- application: for insulated terminals and colour code nests ²

YATO	crimping shape	L (mm)	crimping range	
YT-2285		230	0.5-6mm ²	6/36

Ratchet crimping pliers

230 mm
22-10 (AWG)
0.5-6 mm² (DIN)



- application: for insulated terminals
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2296		230	0.5-6mm ²	5/30

230 mm
20-8 (AWG)
1.5-10 mm² (DIN)



- application: for non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2297		230	1.5-10mm ²	5/30

240 mm RG 58 RG 59 RG 62 RG 6



- application: for crimping RG58,59,62,6 cable
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	
YT-2298		240	5/30

230 mm
22-12 (AWG)
0.5-4 mm² (DIN)



- application: crimping for pin terminal insulated or non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2299		230	0.5-4mm ²	5/30

Ratchet crimping pliers

230 mm	20-18 (AWG) 0.5-1.5 mm ² (DIN)	16-14 (AWG) 1.0-2.5 mm ² (DIN)	18-16 (AWG) 4.0-6.0 mm ² (DIN)
--------	--	--	--



- application: for non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2300		230	0.5-6mm ²	5/30

175 mm	HRC 44-47
--------	-----------



- application: cord end sleeve
- 2 colour PP & TPR handle

YATO	crimping shape	L (mm)	crimping range	
YT-2305		175	0.2-6mm ²	6/36

250 mm	HRC 44-47	20-8 (AWG) 1.5-10 mm ² (DIN)
--------	-----------	--



- application: for non-insulated ferrules
- pressure force can be adjusted, fit for various terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2301		250	0.5-10mm ²	6/36

220 mm	22-10 (AWG) 0.5-6 mm ² (DIN)
--------	--



- application: for insulated terminals and colour code nests

YATO	crimping shape	L (mm)	crimping range	
YT-2302		220	0.5-6mm ²	5/30

Crimping pliers

195 mm	HRC 44-47	22-14 (AWG) 0.5-2.5 mm ² (DIN)
--------	-----------	--

- application: cord end sleeve
- 2 colour PP & TPR handle



- application: for insulated terminals and colour code nests

YATO	crimping shape	L (mm)	crimping range	
YT-2307		195	0.5-2.5mm ²	6/36

Crimping pliers

22-20 (AWG) 0.3-0.5 mm ² (DIN)	18-14 (AWG) 1.0-2.0 mm ² (DIN)	28-26 (AWG) 0.08-0.12 mm ² (DIN)	26-22 (AWG) 0.12-0.3 mm ² (DIN)	26-22 (AWG) 0.12-0.3 mm ² (DIN)
--	--	--	---	---

180 mm



- widely used for cutting, stripping, crimping

YATO	crimping shape	L (mm)	crimping range	
YT-2255		180	0.12-2mm ²	10/60

22-20 (AWG) 0.3-0.5 mm ² (DIN)	18-14 (AWG) 1.0-2.0 mm ² (DIN)	28-26 (AWG) 0.08-0.12 mm ² (DIN)	26-22 (AWG) 0.12-0.3 mm ² (DIN)
26-22 (AWG) 0.12-0.3 mm ² (DIN)	14-10 (AWG) 2.0-6.0 mm ² (DIN)	18-16 (AWG) 1.0-1.5 mm ² (DIN)	20-22 (AWG) 0.3-0.5 mm ² (DIN)

180 mm



- widely used for cutting, stripping, crimping

YATO	crimping shape	L (mm)	crimping range	
YT-2256		180	0.08-6mm ²	10/60

140 mm	22-10 (AWG) 0.2-6.0 mm ² (DIN)
--------	--



- application: for insulated terminals

YATO	crimping shape	L (mm)	crimping range	
YT-2271		140	0.2-6mm ²	20/120

Universal wire stripper

160 mm	HRC 48-52	30-16 (AWG) 0.25-1.3 mm ² (DIN)
--------	-----------	---



YATO	L (mm)	stripping range	
YT-2266	160	0.25-1.3mm	10/60
YT-2267	160	0.8-2.6mm	10/60

Universal wire stripper & Ratchet crimping pliers

205 mm	HRC 55-61	24-10 (AWG) 0.2-6.0 mm ² (DIN)	22-10 (AWG) 1.5-6.0 mm ² (DIN)	12-10 (AWG) 4.0-6.0 mm ² (DIN)	22-14 (AWG) 0.5-2.5 mm ² (DIN)	7-8 mm
--------	-----------	--	--	--	--	--------



- widely used for cutting, stripping, crimping
- double colour non-slip handle


YATO	L (mm)	stripping range	
YT-2270	205	0.5-2.6mm	5/30

Universal wire stripper


14-3 (AWG) 1.5-3.2 mm ² (DIN)	LOCK BLOCK	170 mm
---	------------	--------



YATO	L (mm)	剥线直径	
YT-19691	170	0.6-3.2mm	5/30

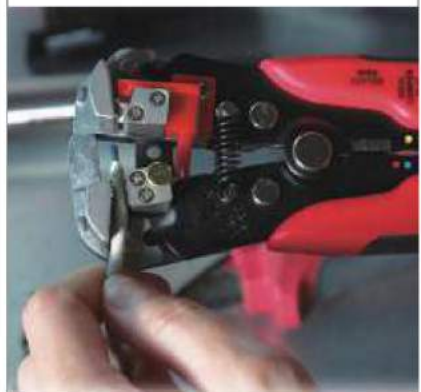

Universal wire stripper



- widely used for cutting, stripping, crimping
- double colour non-slip handle

YATO	L (mm)	stripping range	
YT-2313	205	0.5-2.6mm	5/30

Wire stripper



YATO	L (mm)	stripping range	
YT-2274	125	0.8-2.6mm	15/90

Automatic wire stripper



- stripping range: 1.0/1.6/2.0/2.6/3.2mm²


YATO	L (mm)	
YT-2316	185	8/48

Wire stripper



YATO	L (mm)	stripping range	
YT-2272	140	0.6-2.6mm	20/120

Wire stripper



- cut & strip 8-20AWG solid and 10-22AWG wires
- crimp 10-22AWG insulated & non-insulated terminals and coaxial connectors

YATO	L (mm)	stripping range	
YT-2277	210	0.8-3.3mm	10/60

Automatic wire stripper



- widely used for cutting, stripping
- adjusting length limiter
- max cutting size: 2mm

YATO	L (mm)	
YT-2275	195	10/60

Wire stripper



YATO	L (mm)	stripping range	
YT-2273	180	0.8-2.6mm	10/60

Automatic wire stripper



- stripping range: 1.0/1.6/2.0/3.2mm²

YATO	L (mm)	stripping range	
YT-2276	170	1.0-3.2mm	8/48

Electrician scissors



YATO	L (mm)	
YT-1974	140	12/120

Cable cutter

170 mm
3.5 mm SK5



- side cutter, with lock
- max cutting size: 10.5mm
- screw cutter: 3.5mm

SLIDING CARD

YATO	L (mm)	
YT-2279	170	10/60

Wire stripping pliers

185 mm HRC 50-53 Mn 65
20-10 (AWG) 0.8-2.6 mm (DIN) M4-M5



- material: 65Mn
- widely used for cutting, stripping
- screw cutter: M4-M5

YATO	L (mm)	stripping range	
YT-2290	185	0.8-2.6mm	12/120

Wire stripper

165 mm HRC 50-53 Mn 65
22-10 (AWG) 0.64-2.6 mm (DIN)



- material: 65Mn
- widely used for cutting, stripping

SLIDING CARD

YATO	L (mm)	stripping range	
YT-2294	165	0.6-2.6mm	12/120

Cable stripper

8-28 mm



YATO	L (mm)	stripping range	
YT-2280	190	8-28mm	10/100

Wire stripper

205 mm HRC 50-53 RG 6 Mn 65
22-10 (AWG) 0.64-2.6 mm (DIN) 22-10 (AWG) 0.64-2.6 mm (DIN) M3-M5



- material: 65Mn
- widely used for cutting, stripping
- screw cutter: M3-M5

YATO	L (mm)	stripping range	
YT-2292	205	0.6-2.6mm	12/72

Wire stripper

220 mm HRC 50-53 Mn 65
7 (mm) 22-10 (AWG) 0.64-2.6 mm (DIN) M3-M5



- material: 65Mn
- widely used for cutting, stripping

SLIDING CARD

YATO	L (mm)	stripping range	
YT-2295	220	0.6-2.6mm	12/72

Universal wire stripper & crimping pliers

250 mm HRC 50-53 Mn 65
20-10 (AWG) 0.5-5.5 mm (DIN) 20-10 (AWG) 0.5-5.0 mm (DIN) M2.6-M5
20-10 (AWG) 0.5-5.0 mm (DIN) M 2.6-M5



- widely used for cutting, stripping, crimping
- caser printing
- screw cutter: M2.6-M5

YATO	L (mm)	stripping range	
YT-2254	250	0.8-2.6mm	12/48

Wire stripper

215 mm HRC 50-53 RG 6 Mn 65
18-10 (AWG) 1.0-2.6 mm (DIN) 7-8 (mm) M2.6-M5



- material: 65Mn
- widely used for cutting, stripping

YATO	L (mm)	stripping range	
YT-2293	215	1.0-2.6mm	12/72

Auto matic wire stripper

175 mm HRC 55 65Mn 6 mm
SLIDING CARD



- material: 65Mn
- widely used for cutting, stripping

YATO	L (mm)	stripping range	
YT-2268	175	5-25mm	10/60

Electrical cutter

125 mm



24-20 (AWG)
0.5-1.5 mm² (DIN)

• use for cutting

SLIDING CARD

YATO	L (mm)	stripping range	
YT-2260	125	0.5-0.8mm	15/150

Electrical mini cutter

130 mm HRC 55-57



• material: 65Mn
• use for cutting

SLIDING CARD

YATO	L (mm)	
YT-2263	130MM	12/120

Electrician's knife

85 mm 200 mm 3CR13 HRC 42-48



• made of stainless steel blade, sharp and anti-rust
• high quality wood handle, comfortable grip, good durability

SLIDING CARD

YATO	L (mm)	
YT-7600	200	6/96

Electrician's knife

75 mm 190 mm 3CR13 HRC 42-48



• made of stainless steel blade, sharp and anti-rust
• high quality wood handle, comfortable grip, good durability

YATO	L (mm)	
YT-7601	190	6/96

10

Electrical cutter

125 mm



• use for cutting

YATO	L (mm)	
YT-2261	125	15/150

Electrical mini cutter

130 mm HRC 55-57



• material: 65Mn
• use for cutting

YATO	L (mm)	
YT-2264	130MM	12/120

Electrical cutter

125 mm



• material: stainless steel
• max cutting size: 3mm

SLIDING CARD

YATO	L (mm)	
YT-2262	125	20/120

Insulation tape



EN60454-3-1-1/F-PVC/60/R-Tp
DIELECTRIC STRENGTH > 40 Kv / mm
ELONGATION > 125%
FLAME TEST < 1 s
STORE TEMPERATURE +10°C ~ +40°C
USING TEMPERATURE +5°C ~ +50°C

YATO	size	ply	colour	PCS	PCS
YT-8165	19mmx20M	0.13mm	black	12	72/288
YT-8166	19mmx20M	0.13mm	red	12	72/288
YT-81651	19mmx20M	0.13mm	blue	12	72/288
YT-81652	19mmx20M	0.13mm	green	12	72/288
YT-81654	19mmx20M	0.13mm	yellow	12	72/288
YT-81655	19mmx20M	0.13mm	kelly	12	72/288

Insulation tape

10 PCS



YATO	size	ply	
YT-8156	12mmx10M	0.13mm	10/40

10 PCS



YATO	size	ply	
YT-8173	19mmx20M	0.13mm	6/24

Hydraulic pliers

10-120 mm² Al 10-95 mm² Cu 10-120 mm² 415 mm 8T



BMC & COLOR SLEEVE

YATO	L (mm)	size (mm ²)	pressure (T)	stripping range (mm ²)		die configuration(mm ²)	1/4
				AL	Cu		
YT-22860	415	10-120	8	10-95	10-120	10 16 25 35 50 70 85 120	

Electric glue gun

230V~50Hz 35 (400) W 11 mm



- Warm-up time : 3-6 minutes
- Working temperature: 150-200°
- Glue flow rate :15g/min

YATO	power	voltage	dia. (mm)	12/24
YT-82401	35W	230V	11.0	

Hydraulic pliers

16-240 mm² Al 16-185 mm² Cu 16-240 mm² 470 mm 12T



YATO	L (mm)	size (mm ²)	pressure (T)	stripping range (mm ²)		die configuration(mm ²)	1/3
				AL	Cu		
YT-22861	470	16-240	12	16-185	16-240	16 25 35 50 70 95 120 150 185 240	

Electric glue gun

230V~50Hz 11 mm CE



- Warm-up time : 3-6 minutes
- Working temperature: 150-200°
- Glue flow rate :12g/min

YATO	power	voltage	dia. (mm)	12/48
YT-8240	40W	230V	11.0	
YT-8241	60W	230V	11.0	

Hydraulic pliers

16-300 mm² Al 16-240 mm² Cu 16-300 mm² 470 mm 18-20T



YATO	L (mm)	size (mm ²)	pressure (T)	stripping range (mm ²)		die configuration(mm ²)	1/3
				AL	Cu		
YT-22862	470	16-300	18-20	16-240	16-300	16 25 35 50 70 95 120 150 185 240 300	

Electric glue gun



NEW

YATO	colour	diameter	L(mm)	Pcs. packing
YT-82433	black	11.2	200	5pcs/bag
YT-82434	red	11.2	200	5pcs/bag
YT-82435	blue	11.2	200	5pcs/bag
YT-82436	green	11.2	200	5pcs/bag
YT-82437	yellow	11.2	200	5pcs/bag
YT-82438	white	11.2	200	5pcs/bag
YT-82439	brown	11.2	200	5pcs/bag

Electric glue gun



YATO	colour	diameter(mm)	L(mm)	PCS pack/g
YT-82430	white	11.2	200	52pcs/bag
YT-82431	white	11.2	300	32pcs/bag

Desoldering Pump

PTFE TIP



- small size, desoldering tin effectively
- high quality PTFE suction nozzle, heat-resistant, dissolvent-resistant
- aluminum handle, light weight

YATO	dia. (mm)	Size (mm)	Box
YT-82742	2.5	19.5x190	100/400

Voltage tester

125-250 V~

PLASTIC HANGER



YATO	⊖	L (mm)	Box
YT-2830	4	190	12/144

10

PVC Plastic pipe welder

230V~50Hz 850 W 0-300°C Ø 20, 25, 32 [mm] 40, 50, 63



METAL CASE & COLOR BOX

YATO	W	Box
YT-82250	850	4

Digital voltage tester

12-250 V~ 50-500 Hz LCD DISPLAY CE



- no battery needed
- pocket clip

YATO	light	⊖	L (mm)	Box
YT-2861	no light	4	135	20/500
YT-2862	neon light	4	130	20/500

Voltage tester

125-250 V~



YATO	⊖	L (mm)	Box
YT-28301	3	140	20/400

Desoldering Pump

PTFE TIP



- small size, desoldering tin effectively
- high quality PTFE suction nozzle, heat-resistant, dissolvent-resistant
- plastic handle, light weight

YATO	dia. (mm)	Size (mm)	Box
YT-82743	3.0	21.8x206	100/400

Digital voltage tester



YATO	⊖	L (mm)	Box
YT-2863	4	160	6/120

Digital voltage tester

50-500 Hz CE LED 70-250 V 70-400 V POWER SOURCE 2x1.5 V LR41 ULTRALIGHT ULTRATHIN ULTRASTRENGTH



- material: brass, long life time

YATO	⊖	L (mm)	Box
YT-2864	4	140	6/120

Tile cutting pliers

200 mm 2x YG-6X COATED TiN

NEW



YATO	L.(mm)	
YT-37161	200	6/36

Visual fault locator

10 km 10 mW

NEW



YATO		
YT-73098		1/100

3 Holes fiber stripper

NEW



YATO		
YT-22733		1/100

Small mid span splitter

NEW



YATO		
YT-22655		1/100

Visual fault locator

5km 1mW 2Hz

NEW



YATO		
YT-73097		1/100

Drop fiber cable stripper

NEW



YATO		
YT-22810		1/100

Length ways stripper



NEW

YATO	
YT-22805	1/100

Fiber cleaver



NEW

YATO	
YT-22650	1/50

Optical power meter

-70~+6 dBm 700~1700 nm ±0.01 dB



NEW

YATO	
YT-73095	1/100

Internal soldering iron

230V ~50Hz	25W	230V ~50Hz	30W	230V ~50Hz	40W
450°C	TIP R0.3x0.7x1.8 0.3mm	450°C	TIP R0.3x0.7x1.8 0.3mm	450°C	TIP R0.3x0.7x1.8 0.3mm
YT-82475	YT-82476	YT-82477			



- exchangeable long life tip and grounded structure
- heating up super rapidly, and return to soldering temperature quickly
- light handle, easy to operate

YATO	power	voltage	T	
YT-82475	25W	230V	450°C	6/60
YT-82476	30W	230V	450°C	6/60
YT-82477	40W	230V	450°C	6/60

External soldering iron

230V ~50Hz	25W	230V ~50Hz	30W	230V ~50Hz	40W	230V ~50Hz	60W
420°C	TIP R0.3x0.7x1.8 0.3mm	440°C	TIP R0.3x0.7x1.8 0.3mm	500°C	TIP R0.3x0.7x1.8 0.3mm	500°C	TIP R0.3x0.7x1.8 0.3mm
YT-82470	YT-82471	YT-82472	YT-82473				



- exchangeable long life tip and grounded structure
- heating up super rapidly, and return to soldering temperature quickly
- light handle, easy to operate

YATO	power	voltage	T	
YT-82470	25W	230V	420°C	6/60
YT-82471	30W	230V	440°C	6/60
YT-82472	40W	230V	500°C	6/60
YT-82473	60W	230V	500°C	6/60

Soldering station


48W 150-450°C 7.1mm/55mm LCD



COLOR BOX

YATO	power	T	
YT-82455	48W	150-450	1/4

Digital multimeter




- 3 1/2 digits LCD; low battery indication;
- overload protection;
- audible continuity;
- voltage DC: 200M-2000M-20-200-500V;
- current AC: 200-500V;
- current DC: 2000U-20M-200M-5A;
- resistance: 200-2K-20K-200K-2000KΩ;
- continuity; diode check;
- power source: 9V battery;
- dimensions: 126x70x24mm, weight 200G

COLOR BOX



YATO	L (mm)	W (mm)	H (mm)
YT-73080	126x70x24	200	50


Digital multimeter



- 3 1/2 digits lcd;
- low battery indication
- overload protection
- audible continuity
- voltage DV: 200M-2-20-200-1000V
- voltage AV: 200M-2-20-200-750V
- current DC: 2M-20M-200M-10A
- current AC: 2M-20M-200M-2A/10A
- resistance: 200-2K-20K-200K-2M-20MΩ
- capacitance: 2N-20N-200N-2M-20MF
- diode check: 2.8V/1MA
- power source: 9V battery
- dimensions: 180x90x40mm; weight 360G

YATO	L (mm)	W (mm)	H (mm)
YT-73082	180x90x40	360	30


Digital multimeter



- 3 1/2 digits LCD with backlight
- 12 functions for DCV, ACV, DCA, ACA, OHM
- diode check; auto range; auto power off
- data-hold function
- display: 1999 counts
- height of digit: 16mm
- DC voltage: 200M/2/20/200/600V
- AC voltage: 200M/2/20/200/600V
- DC current: 200M/2000M/20M/200MA/2A/10A
- AC current: 200M/2000M/20M/200MA/2A/10A
- resistance: 200/2K/20K/200K/2MΩ/20MΩ
- temperature: -20 ~ +1000°C/0 ~ +1800°F
- capacitance: 20N-1000MF; continuity
- power: 1.5V(AAA) x 3
- dimensions (w×h×t): 158x75x35mm; weight: 200g

YATO	L (mm)	W (mm)	H (mm)
YT-73084	158x75x30	200	44

Digital multimeter



- LCD display; display: 3999 counts; backlight
- data-hold function; auto power off
- voltage DC: 400M/4/40/400/600V
- current DC: 400M/4000M/40M/400M/10A
- voltage AC: 4/4C/400/600V
- current AC: 400M/4000M/40M/400M/10A
- resistance: 400/4K/40K/400K/4MΩ/40MΩ
- capacitance: 4N/40N/400N/4M/40M/100MF
- frequency: 10/100/1K/10K/100KHZ
- temperature: -20 ~ +1000°C
- duty cycle: 5% ~ 95%
- continuity; diode check
- power: 9V battery (6F22)
- dimensions (w×h×t): 83x162x47mm



YATO	L (mm)	W (mm)	H (mm)
YT-73086	165x83x40	355	24

Digital multimeter

- 5 in 1
- U 0-600 ~V
- U 0-600 ~V
- D-10 ~A
- I 0-10 ~A
- R 0-40 MΩ
- C 0-100 μF
- f 200 kHz
- T -20~+1000°C
- 13-100dB
- %RH 30%~90%
- 1%~99%
- AUTO POWER OFF
- 45000lx
- AUTO RANGE
- AUTO ZANRES
- USB
- CE



- voltage DC: 0.4/4/40/400/600V
- voltage AC: 4/40/400/600V
- current DC: 400M/4000M/40M/400M/10A
- current AC: 400M/4000M/40M/400M/10A
- resistance: 40Ω/4K/40K/400K/4M/40MΩ
- capacitance: 4N/40N/400N/4M/40M/100MF
- frequency: 10/100/1K/10K/100K/200KHZ
- duty cycle: 0.1% ~ 99.9%
- temperature: -20 ~ +1000°C
- humidity: 30%-95%
- light: 4000LUX/40000LUX
- sound level: 35 ~ 100db
- continuity: diode check
- power: 9V battery (6F22)
- dimensions (W×L×T): 83×162×47MM; weight: 310g



YATO	L (mm)		
YT-73087	165×83×40	330	24

Digital multimeter

- U 0-600 ~V
- U 0-600 ~V
- I 0-600 ~A
- R 0-200 MΩ
- T -20~+1000°C
- AUTO POWER OFF
- AUTO RANGE
- AUTO ZANRES
- CE



- 1/2 digits LCD; display: 1999 counts;
- display backlight function
- overload protection
- maximum value hold mode
- low battery indication
- automatic zeroing function
- voltage DC: 200M/2/20/200/600V
- voltage AC: 2/20/200/600V
- current AC: 2/20/200/600A
- resistance: 200/2K/20K/200K/2M/20MΩ
- temperature: -20 ~ +1000°C / -4 ~ +1832°F
- diode check: approx. 1.5V
- continuity: <50Ω
- power: 1.5V(AAA) battery×2
- dimensions: 77×230×32mm; weight: 220g



YATO	L (mm)		
YT-73091	230×79×32	220	20

Hot air gun with accessories

- 230V~50Hz
- 2000 W
- LCD DISPLAY
- Temperature adjustment
- 600°C
- 500 l/min



BMC & Colour SLEEVE

Mains voltage	[V]	230~
Mains frequency	[Hz]	50
Nominal power	[W]	2000
Blowing temperature (max)	[°C]	50 (I) / 70 - 600 (II) / 70 - 600 (III)
Air flow	[l/min]	300 (I) / 300 (II) / 500 (III)
Insulation class		II
Net mass	[kg]	0,81
Protection grade		IP20

YATO	W	
YT-82293	2000	5

Hotair Gun

- 230V~50Hz
- 2000 W
- 550°C
- 500 l/min



BMC & Colour SLEEVE

Mains voltage	[V]	230~
Mains frequency	[Hz]	50
Nominal power	[W]	2000
Blowing temperature (max)	[°C]	350 (I) / 550 (II)
Air flow	[l/min]	300 (I) / 500 (II)
Insulation class		II
Net mass	[kg]	0,76
Protection grade		IP20

YATO	W	
YT-82291	2000	5

Extension cord

1800 W
220V
~50Hz

NEW



YATO	W	
YT-82300	1800	5

Extension cord

16 A
~250V
CABLE
KABEL
IP44
E
E-1
E-2
E-3
E-4
E-5
E-6
E-7
E-8
E-9
E-10
E-11
E-12
E-13
E-14
E-15
E-16
E-17
E-18
E-19
E-20
E-21
E-22
E-23
E-24
E-25
E-26
E-27
E-28
E-29
E-30
E-31
E-32
E-33
E-34
E-35
E-36
E-37
E-38
E-39
E-40
E-41
E-42
E-43
E-44
E-45
E-46
E-47
E-48
E-49
E-50
E-51
E-52
E-53
E-54
E-55
E-56
E-57
E-58
E-59
E-60
E-61
E-62
E-63
E-64
E-65
E-66
E-67
E-68
E-69
E-70
E-71
E-72
E-73
E-74
E-75
E-76
E-77
E-78
E-79
E-80
E-81
E-82
E-83
E-84
E-85
E-86
E-87
E-88
E-89
E-90
E-91
E-92
E-93
E-94
E-95
E-96
E-97
E-98
E-99
E-100



Colour BOX

YATO	L (m)	
YT-8100	20	4
YT-8101	30	2
YT-8102	40	2

Cable reel

16 A
~230V
CABLE
KABEL
IP44
E
E-1
E-2
E-3
E-4
E-5
E-6
E-7
E-8
E-9
E-10
E-11
E-12
E-13
E-14
E-15
E-16
E-17
E-18
E-19
E-20
E-21
E-22
E-23
E-24
E-25
E-26
E-27
E-28
E-29
E-30
E-31
E-32
E-33
E-34
E-35
E-36
E-37
E-38
E-39
E-40
E-41
E-42
E-43
E-44
E-45
E-46
E-47
E-48
E-49
E-50
E-51
E-52
E-53
E-54
E-55
E-56
E-57
E-58
E-59
E-60
E-61
E-62
E-63
E-64
E-65
E-66
E-67
E-68
E-69
E-70
E-71
E-72
E-73
E-74
E-75
E-76
E-77
E-78
E-79
E-80
E-81
E-82
E-83
E-84
E-85
E-86
E-87
E-88
E-89
E-90
E-91
E-92
E-93
E-94
E-95
E-96
E-97
E-98
E-99
E-100



• $P_{max} = 1200 W$ coiled
 $P_{max} = 1200 W$ zwinięty
 • $P_{max} = 3600 W$ uncoiled
 $P_{max} = 3600 W$ rozwinięty

YATO	L (m)	
YT-8106	30	1
YT-8107	40	1
YT-8108	50	1

Tweezer

140 mm
HRC 30



• stainless steel
 • antistatic, anti-acid

YATO	L (mm)		
YT-6903	140	10	20/480

115 mm
HRC 30



• stainless steel
 • antistatic, anti-acid

YATO	L (mm)		
YT-6907	115	15	240

130 mm
HRC 40



• stainless steel
 • antistatic, anti-acid, non-corrosive, non-glare

YATO	L (mm)		
YT-6912	130	15	20/480

130 mm
HRC 40



• stainless steel
 • antistatic, anti-acid, non-corrosive, non-glare

YATO	L (mm)		
YT-6913	130	15	20/480

Tweezer

140 mm
HRC 40



• stainless steel
 • antistatic, anti-acid, non-corrosive, non-glare

YATO	L (mm)		
YT-6916	140	15	240

Tweezer

140 mm
HRC 40



• stainless steel
 • antistatic, anti-acid, non-corrosive, non-glare

YATO	L (mm)		
YT-6917	115	20	20/480