



LED 200W SMD FLOOD LIGHT

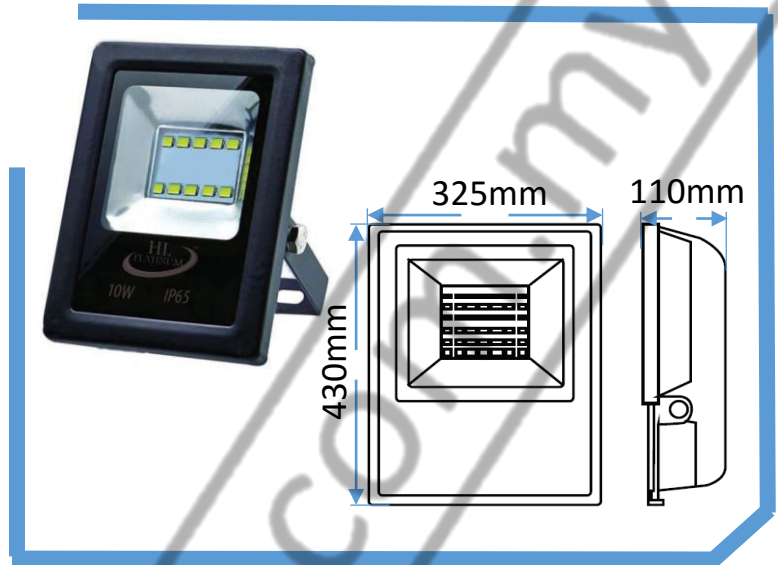

Input voltage : AC 240V
 Power factor : > 0.9
 Operating temperature : 20~50°C
 Color Rendering Index : >RA 80
 IP Class : IP 65
 Materials : Die Cast Aluminium, Tempered Glass
 Warranty : 2 years
 Dimension(mm) : 325 X 430 X 110

Model	Wattage (W)	Luminous Flux (Lm)	System Efficiency (Lm/W)	Color Temperature (K)
HLP-FLU-200DN-PZ-V	200	16737.2	83.85	2800K (Warm White)
				4000K (Nature White)
				5700K ~ 6000K (Cool White)

*V refers to color temperature. (w/w=3000K(warm white), n/w=4000K(natural white), and w=5700K(white)).

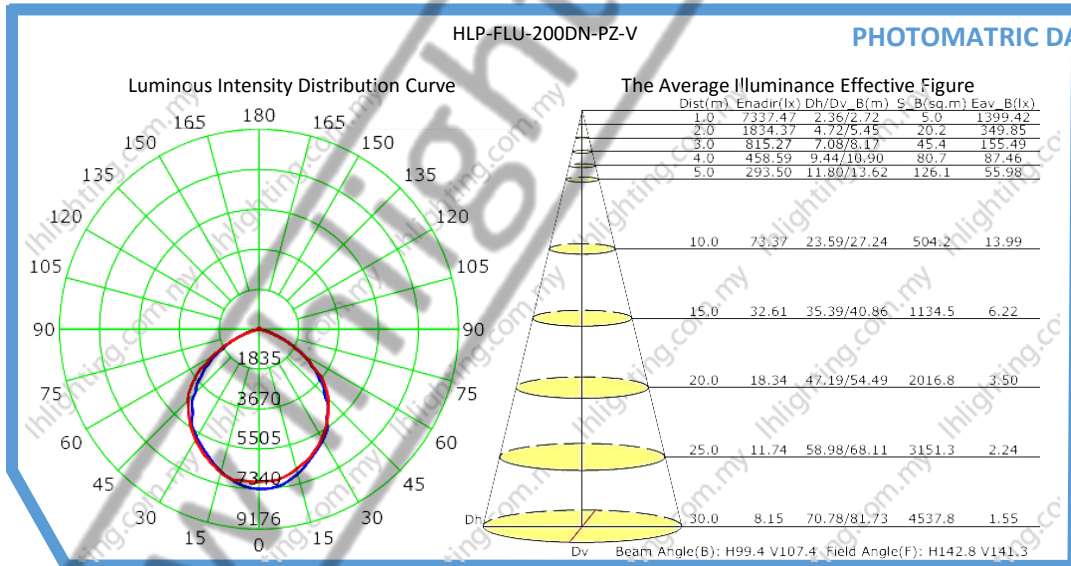

COMPLIANCE STANDARD & LUMINAIRE TECHNICAL DATA

- LED : LM80
- Luminaire : LM79-08
- Operating Temperature : 20 °C ~ 50°C
- Ingress Protection : IP 65

LED TECHNICAL DATA & POWER SUPPLY

- LED Light Source : Lumileds LUXEON 3030 2D
- Rendering index : > RA 80
- LED Life Cycle : 52,000 hours
- Power Factor : > 0.9
- Output Current : 6.0 A
- Life Cycle : > 36,000 hours

APPLICATIONS

Warehouse, Auditorium (halls), Shopping Production Areas & Factories