



LED 200W SMD FLOOD LIGHT

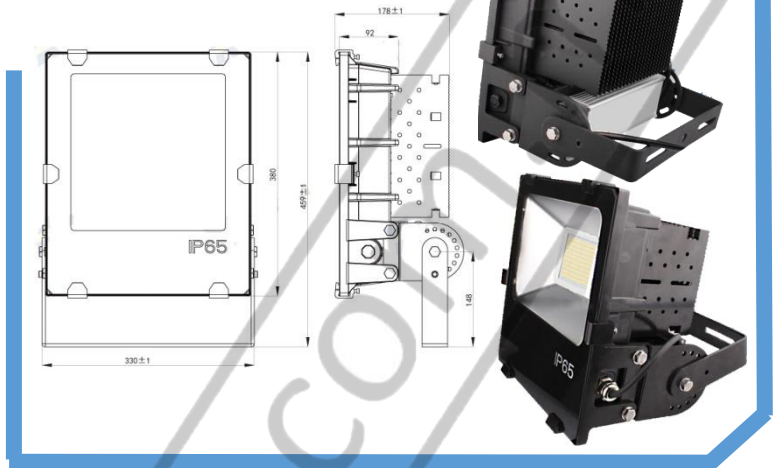

Input voltage : AC 240V
 Power factor : 0.971
 Operating temperature : 20~50°C
 Color Rendering Index : >RA 80
 IP Class : IP 65
 Materials : Pure Aluminium, Tampered Glass
 Warranty : 5 years
 Dimension(mm) : 330 X 380 X 178

Model	Wattage (W)	Luminous Flux (Lm)	System Efficiency (Lm/W)	Color Temperature (K)
SL-FLQB-200DN-PM-V	200	18707.3	92.25	2800K (Warm White)
				4000K (Nature White)
				5700K ~ 6000K (Cool White)

*V refers to color temperature. (w/w=3000K(warm white), n/w=4000K(natural white), and w=5700K(white).

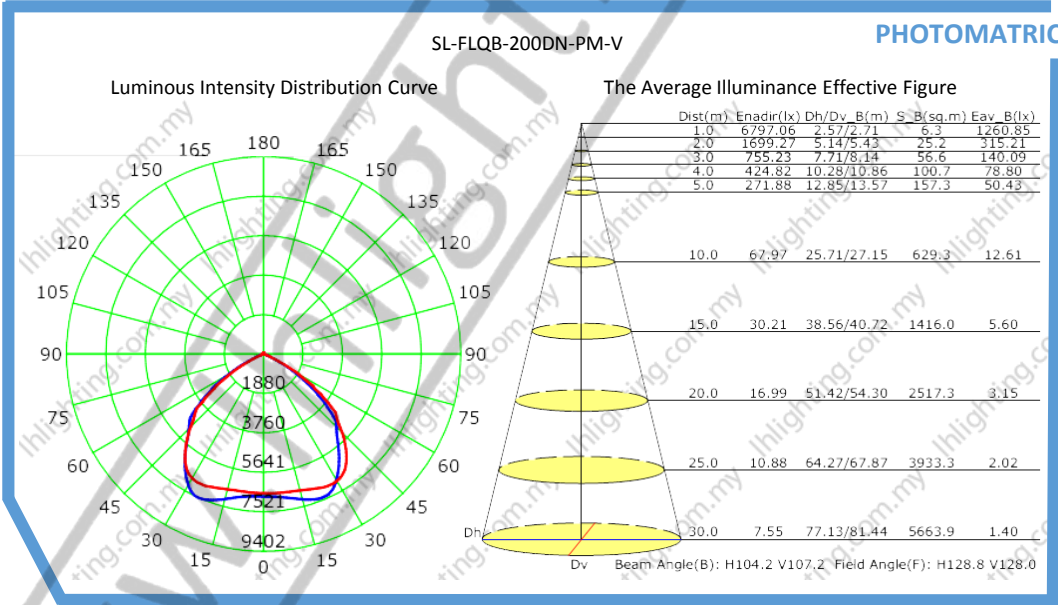

COMPLIANCE STANDARD LUMINAIRE TECHNICAL DATA

- LED : LM80
- Luminaire : LM79-08
- Operating Temperature : 20 °C ~ 50°C
- Ingress Protection : IP 65

LED TECHNICAL DATA POWER SUPPLY

- LED Light Source : Lumileds LUXEON 3030 2D
- Rendering index : > RA 80
- LED Life Cycle : 52,000 hours
- Brand : Meanwell (5 Years)
- Power Factor : > 0.9
- Output Current : 6000 mA
- Life Cycle : > 50,000 hours
- Certificate: EN61000, EN61347-1, EN 61347-2-13, UL60950-1

APPLICATIONS

Warehouse, Auditorium (halls), Shopping Production Areas & Factories

* All LED components are subjected to LED manufacturer and warranty terms and conditions
* Specifications are subjected to change without prior notice