


LED PANEL LIGHT


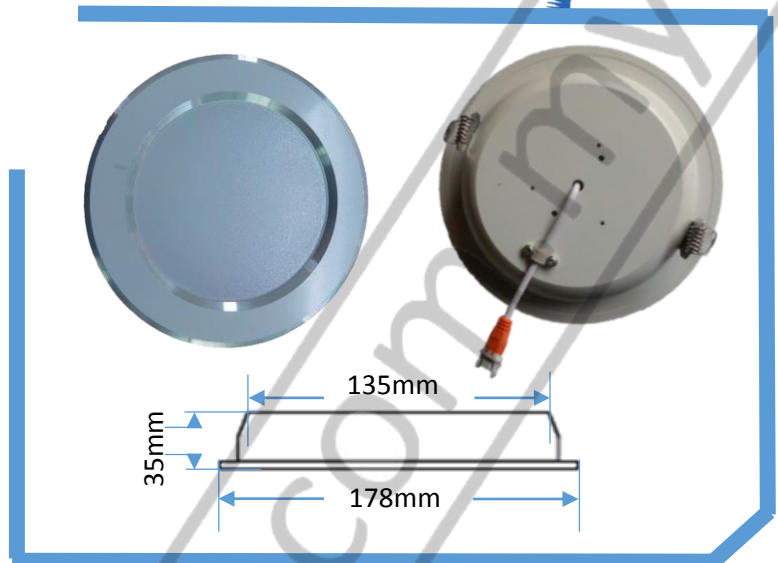


Input voltage : AC 220 – 240V
 Power factor : 0.92
 Operating temperature : 20~50°C
 Color Rendering Index : >RA 80
 IP Class : IP 43
 Materials : Pure Aluminium
 Warranty : 2 years
 Dimension(mm) : 178 X 35

Model	Wattage (W)	Luminous Flux (Lm)	System Efficiency (Lm/W)	Color Temperature (K)
HLP-PLCR5-14DN-PZ-V	14	1149.1	80.3	2800K (Warm White) 4000K (Nature White) 5700K ~ 6000K (Cool White)

*V refers to color temperature. (w/w=3000K(warm white), n/w=4000K(natural white), and w=5700K(white)).

PHOTOMETRIC DATA

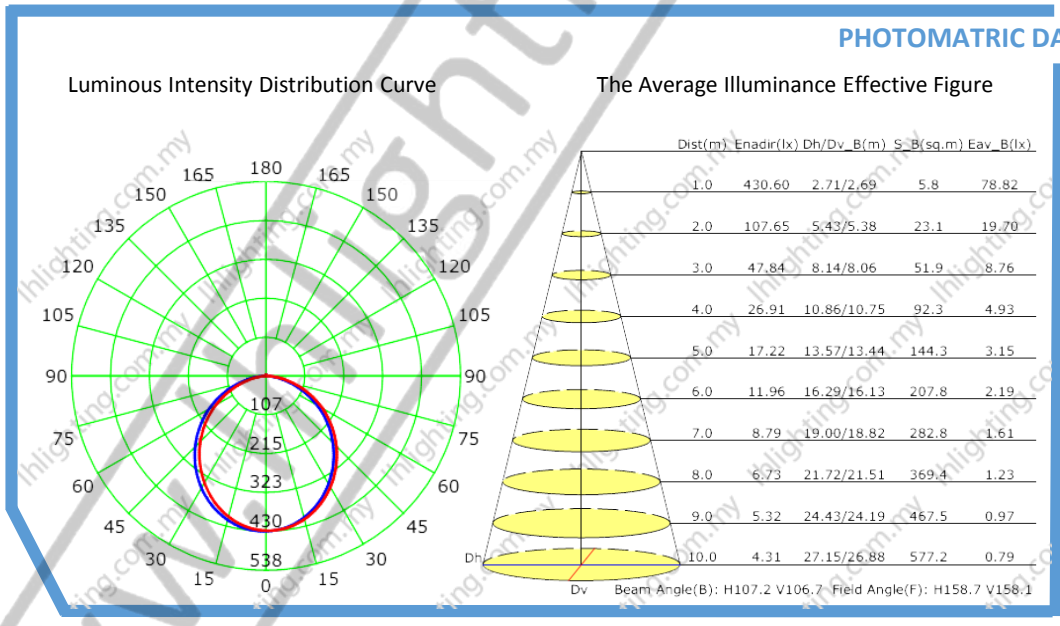

COMPLIANCE STANDARD

- LED : LM80
- Luminaire : LM79-08

LUMINAIRE TECHNICAL DATA

- Operating Temperature : 20 °C ~ 50°C
- Ingress Protection : IP 43

LED TECHNICAL DATA

- LED Light Source : LUXEON 2835 LINE
- Rendering index : > RA 80
- LED Life Cycle : 52,000 hours

POWER SUPPLY

- Power Factor : > 0.9
- Output Current : 300 mA
- Life Cycle : > 30,000 hours

APPLICATIONS

Commercial Areas, Resident Areas, Office, Corridor Daily > 12 hour