

CorrosionMaster Single FNF 2.4

Technical Data Sheet

Product Code	FNF 2.4
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


☑ Standards	AS/NZS 1892.3
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🌡 Heat Resistance	130 Degrees Celsius
🧪 Chemical Resistance	Tested to AS/NZS 1892.3
☁ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 6.2kg / Base: 6.6kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 2.465m / Base: 2.420m
📏 Height to Top Rung	2.005m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel

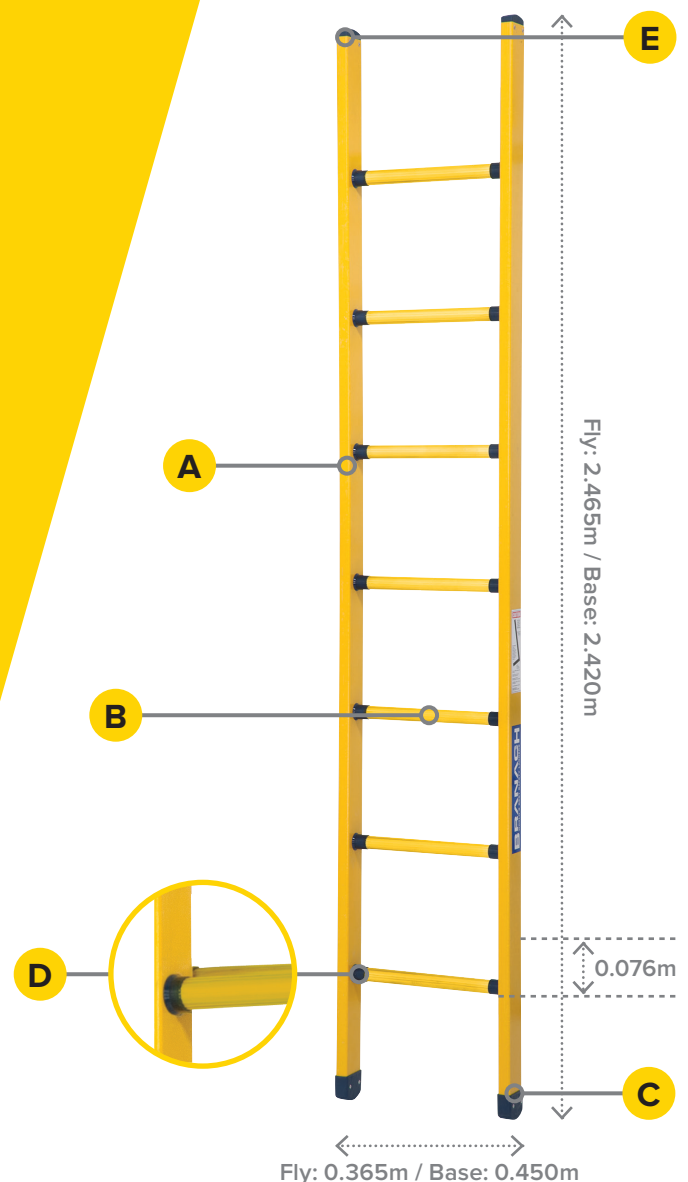

CorrosionMaster Single FNF 3.0

Technical Data Sheet

Product Code	FNF 3.0
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


☑ Standards	AS/NZS 1892.3
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧪 Chemical Resistance	Tested to AS/NZS 1892.3
☁ Accelerated Weathering Test	Tested to AS 2331.3.1
🛡 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 7.9kg / Base: 8.3kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 3.075m / Base: 3.030m
📏 Height to Top Rung	2.650m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel

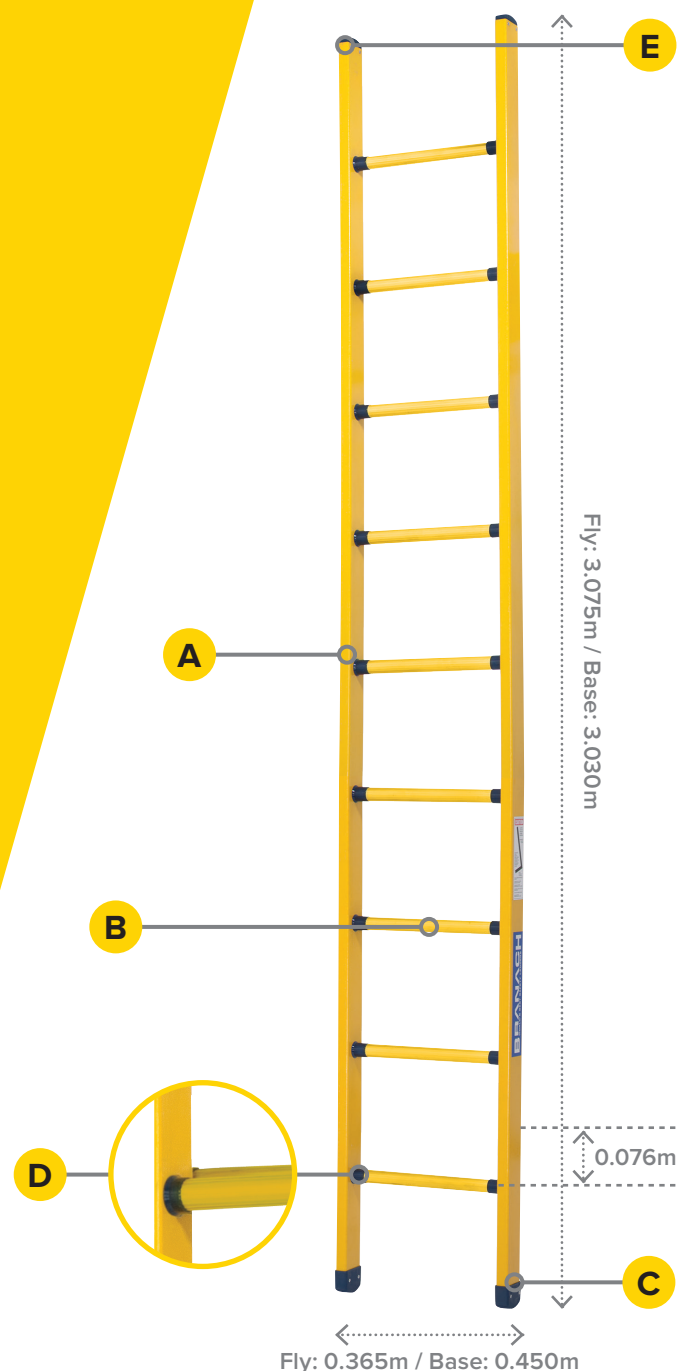

CorrosionMaster Single FNF 3.6

Technical Data Sheet

Product Code	FNF 3.6
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


✓ Standards	AS/NZS 1892.3
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧪 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 9.6kg / Base: 9.9kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 3.685m / Base: 3.640m
📏 Height to Top Rung	3.250m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel

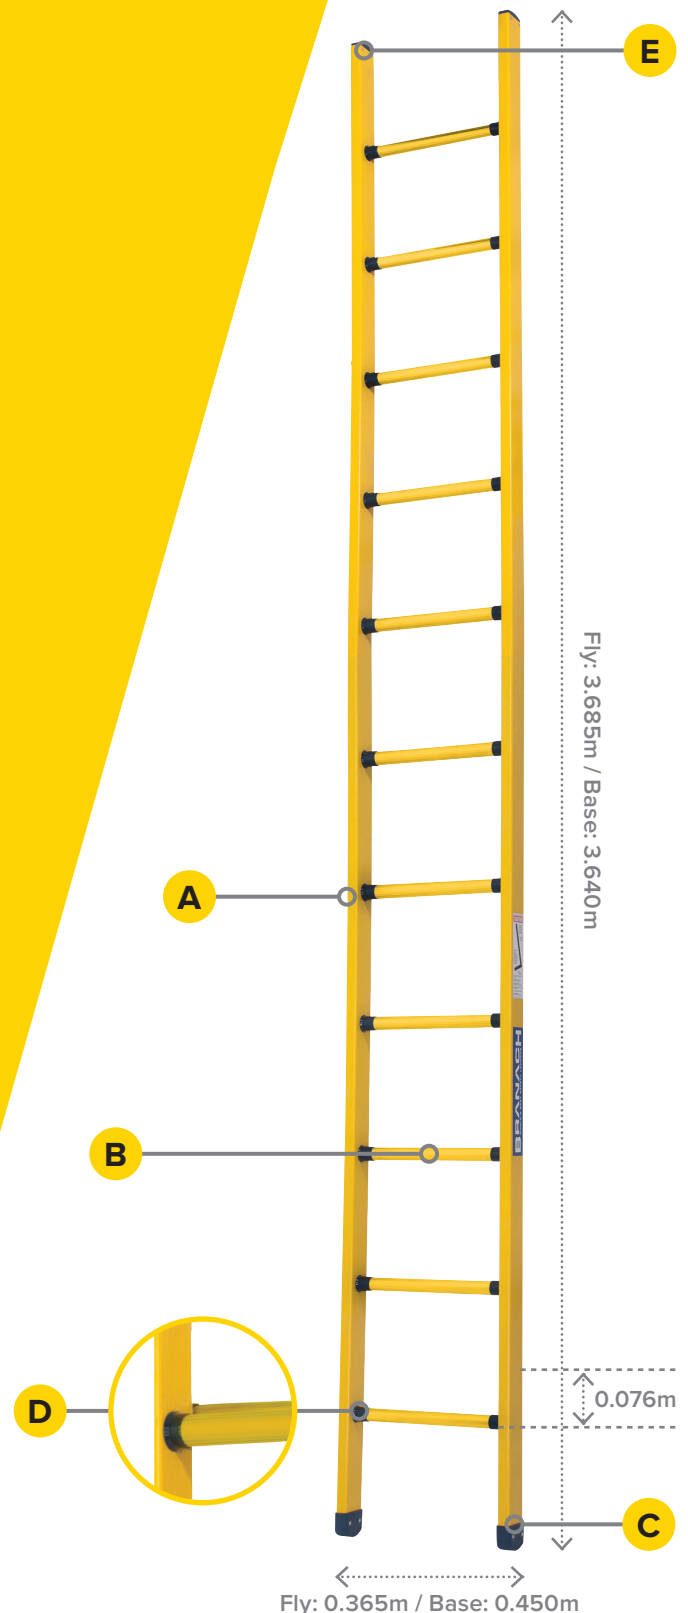

CorrosionMaster Single FNF 4.2

Technical Data Sheet

Product Code	FNF 4.2
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


✓ Standards	AS/NZS 1892.3
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧪 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 12.8kg / Base: 13.3kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 4.295m / Base: 4.250m
📏 Height to Top Rung	3.850m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel

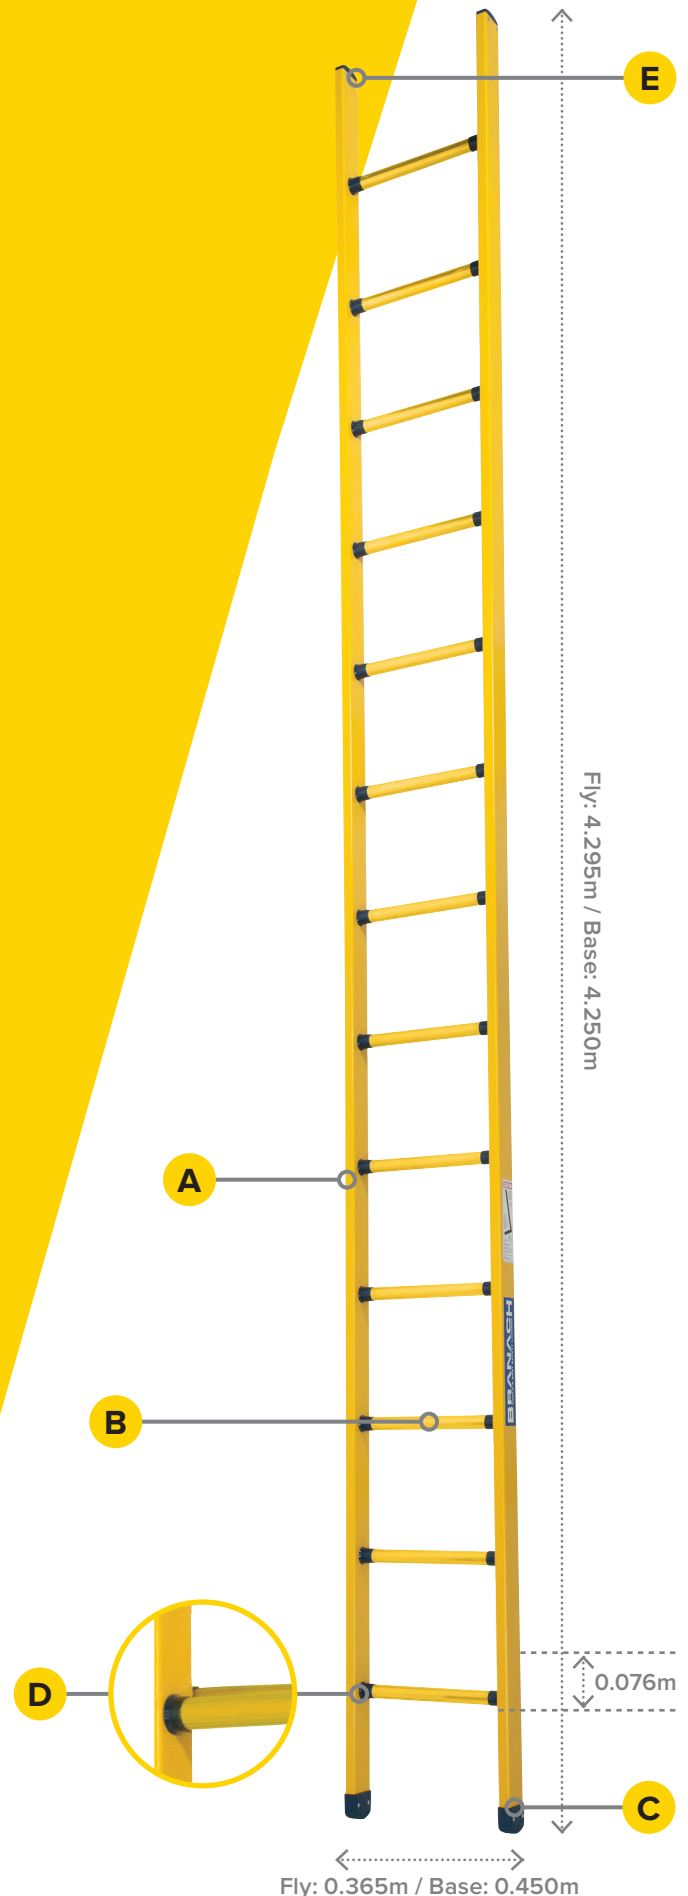








CorrosionMaster Single FNF 4.8






Technical Data Sheet

Product Code	FNF 4.8
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES

 Standards	AS/NZS 1892.3
 Load Rating	150kg
 Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
 Heat Resistance	130 Degrees Celsius
 Chemical Resistance	Tested to AS/NZS 1892.3
 Accelerated Weathering Test	Tested to AS 2331.3.1
 Warranty	3 years from date of manufacturing

MEASUREMENTS

 Weight	Fly: 14.6kg / Base: 15kg
 Distance Between Rungs	0.305m
 Height	Fly: 4.905m / Base: 4.860m
 Height to Top Rung	4.495m
 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel



CorrosionMaster Single FNF 5.4

Technical Data Sheet

Product Code	FNF 5.4
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES

✓ Standards	AS/NZS 1892.3
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧪 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 16kg / Base: 16.5kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 5.515m / Base: 5.470m
📏 Height to Top Rung	5.005m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Thermoplastic Vulcanizate
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon PV 35H – Black
Rivets	Zinc Plated Low Carbon Steel

