


MXTL1033-Y

- ◆ ✕ Save around of 85% less energy
- ◆ ✕ Save the budget and maintenance costs
- ◆ ✕ Low temperature and cooler environment
- ◆ ✕ Environmentally Friendly
- ◆ ✕ High luminous flux, high luminous efficiency
- ◆ ✕ Comply with LVD, Safe and reliable

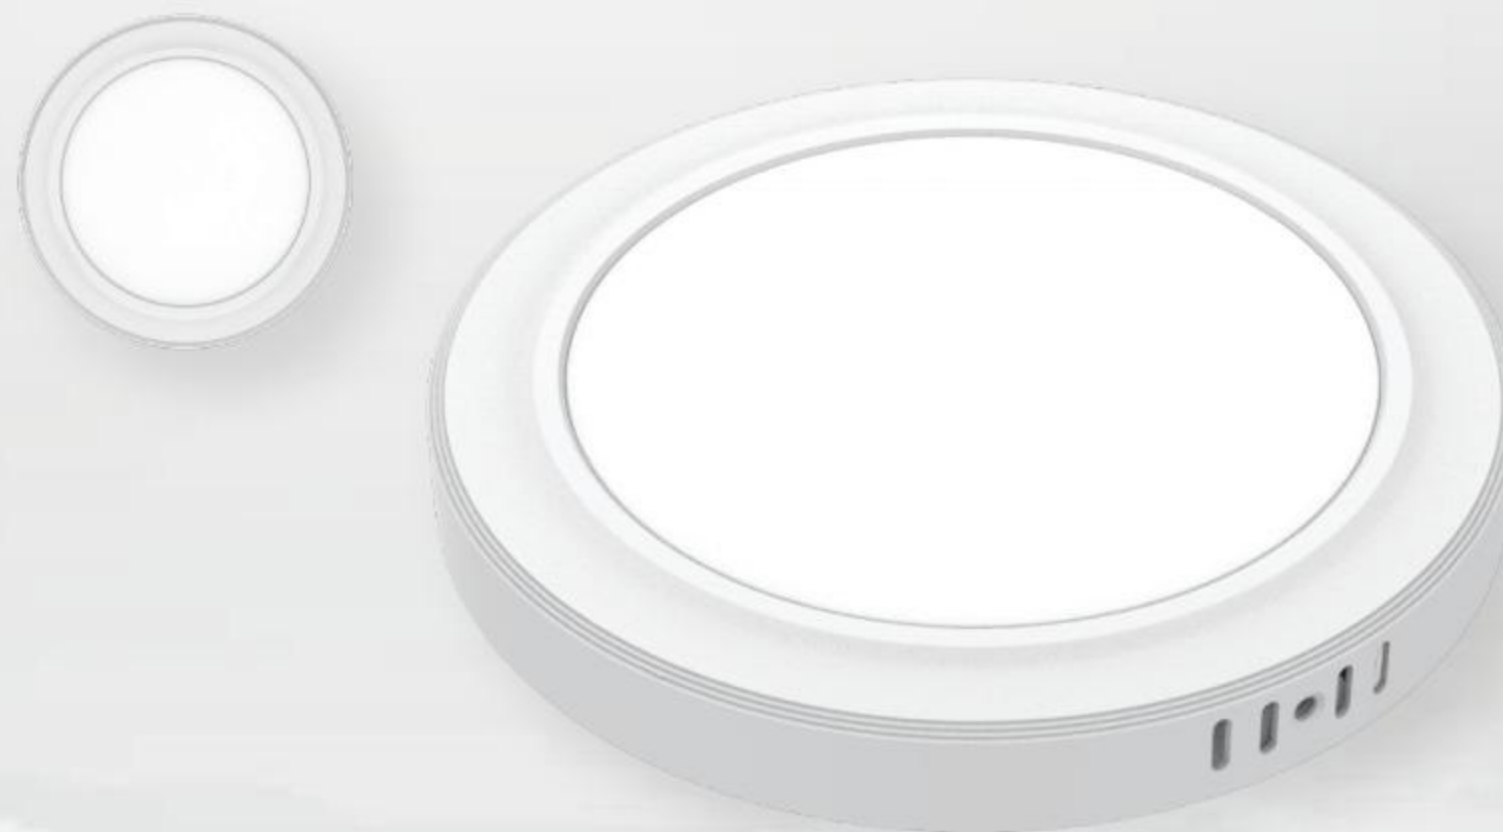

Type	Watts	Voltage	PF	Luminous Flux 3000K/4000K&6500K	Beam Angle	CRI	Dimension (mm)	Lifetime (h)	Quantity
MXL1033-Y/15W	15W	220-240V	0.5	1200/1350lm	120°	≥80	Ø180x25	15000	60/ctn
MXL1033-Y/24W	24W	220-240V	0.5	1920/2160lm	120°	≥80	Ø225x25	15000	40/ctn
MXL1033-Y/30W	30W	220-240V	0.5	2400/2700lm	120°	≥80	Ø250x25	15000	20/ctn

E S L LIGHTING (M) SDN BHD (746428-A)

No. 19, 19-1, 19-2, Jalan PDR 6, Kawasan Perniagaan Desa Ria, 43300 Balakong, Seri Kembangan, Selangor.

Tel: 03-8961 2308 Fax: 03-8961 2305

Website: www.esllighting.com.my



Warm White
3000K



Cool White
4000K



Day Light
6500K