

NEW LE 116
HIGH EFFICIENCY


ENERGY CONSERVING EMERGENCY
LIGHTING LUMINAIRE



Technical Data

Mode Of Operation	: Non-Maintained.
Input Voltage	: 240V±10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery.
Charging Current	: 100mA (Nominal).
Lamp Used	: 8.0 Watt SMD LED (16 x 0.5 Watt)
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Injection Moulded Fire-Retardant ABS Polyester Base with Side Knockout Cable Entry. Injection Moulded Fire-Retardant Polycarbonate Gear Tray and Acrylic Diffuser.
Weight	: <u>0</u> 0.6kg
#Warranty	: 5 Years.
Compliance	: Malaysia Standards MS-619, IP-20.
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.

Optional : Recessed Frame

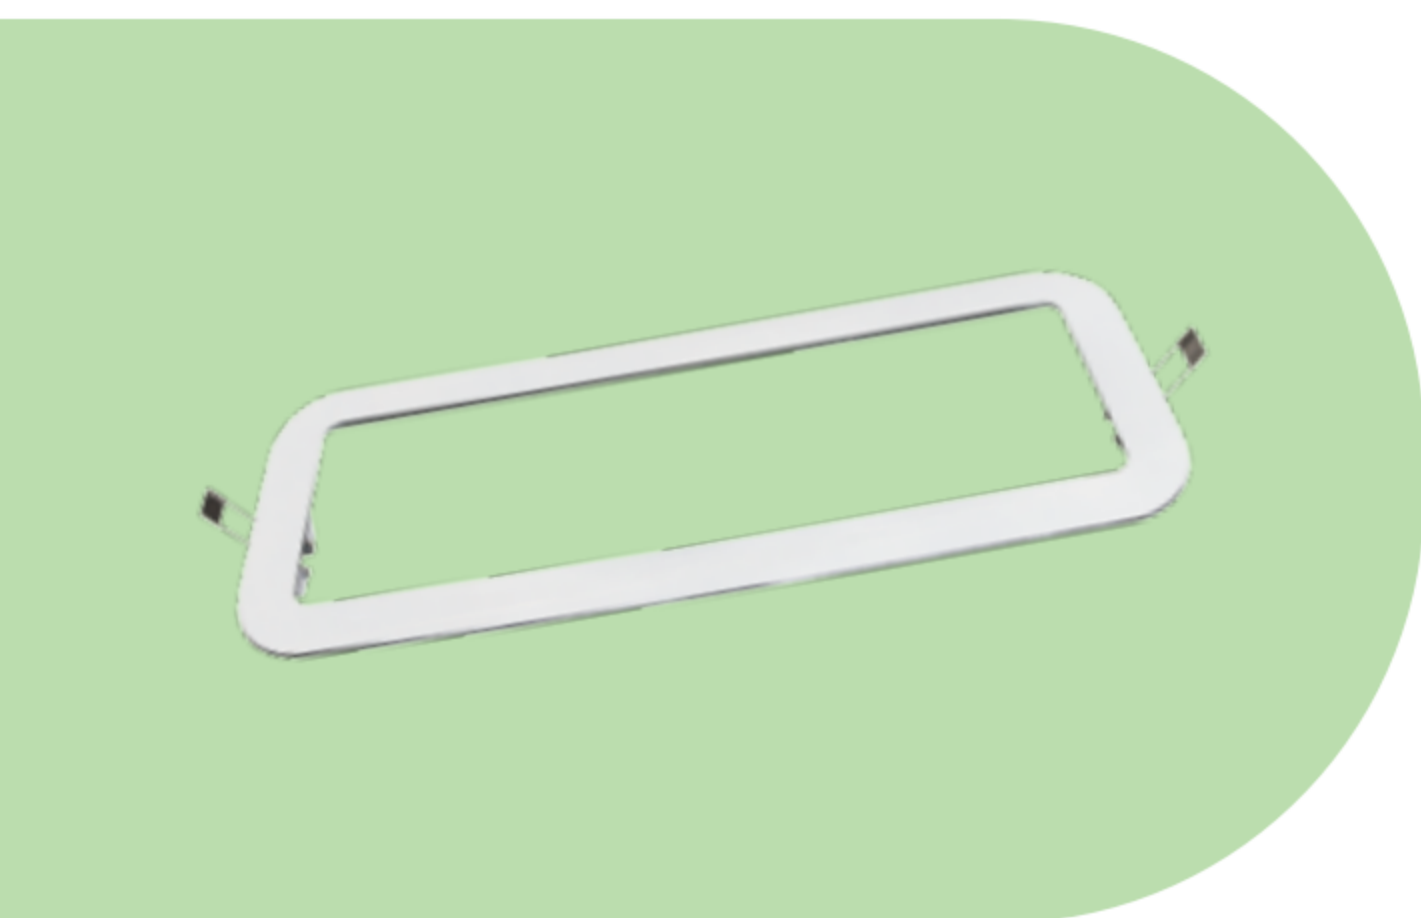

Dimension in mm Tolerance: ±0.03

