

BSLight



Designing Backlit LED Panel Light With 3 Colour Mode Changeable



APPLICATION

Ideal for office, hotel, meeting room, hall ways warehouse, workshop and commercial or residential place.




FEATURES

- Easy to install
- Low maintenance cost
- Environmental protection
- Directly replace the original ordinary fluorescent lamps.
- High transparent PS diffuser
- 3 colour mode changeable
- Flicker Free



LUMINAIRE SPECIFICATION

- Input Voltage : 220-240V~ 50/60Hz
- Power : 48W
- Colour Temperature : 3000K/4000K/6500K (3 COLOR MODE CHANGEABLE)
- Colour Rendering Index : $Ra \geq 80$
- Beam Angle : 120°
- Power Factor : ≥ 0.5
- Efficiency : $\geq 85\%$
- Operating Temperature : $-30^\circ\text{C} \sim 40^\circ\text{C}$
- Lifetime : 15,000 Hrs

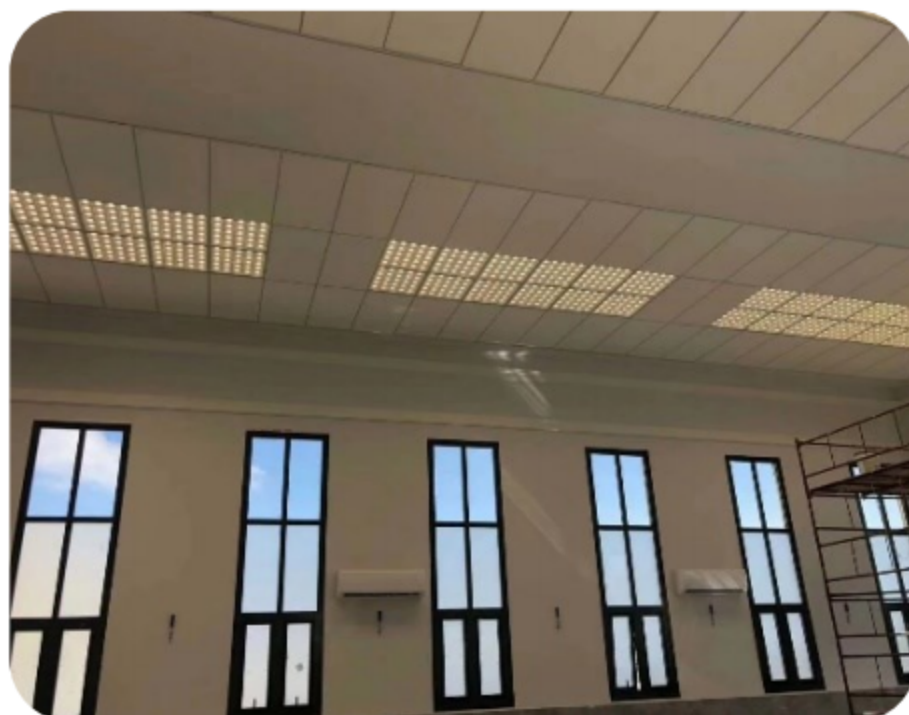

Model	Power (W)	Input Voltage (V)	CCT (K)	Lumen (LM)	Life Time (Hours)	Size (LxWxH) mm	Packing
BSBL2248MM-3C	48W	AC 165-265V	3000/4000/6500K	4000-4800	15,000	595 x 595 x 25	10/ctn