




Surface Mounted Prismatic Diffuser
with Hinged Frame Fitting



APPLICATION

Mainly used for technical workshop, hospitals,
laboratories, food industry, office and supermarket.

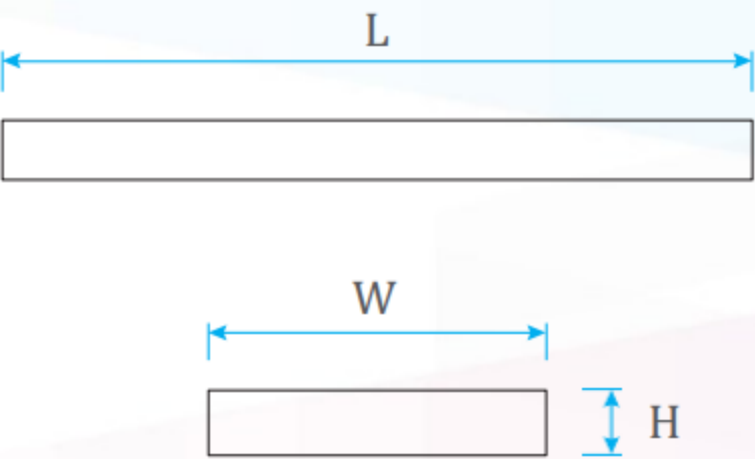

SPECIFICATION

Type	▶ Surface mounted diffused with hinged frame
Model/Code	▶ BM/HF (surface hinged frame)
Body	▶ High quality gauge sheet steel
Paint work	▶ Fully coated with epoxy powder coated finished
Mounting	▶ Surface type
Light source	▶ Fluorescent TLD lamp and T8 LED tube
Lampholder & starterholder	▶ Polycarbonate material
Components	▶ Conventional or Electronic ballast, EL emergency power pack, Fused terminal block

MODEL	NO. OF LAMP	L (mm)	W (mm)	H (mm)
BM/HF 220 (1' x 2')	2 x 18W	612	298	85
BM/HF 220	2 x 18W	612	603	85
BM/HF 320	3 x 18W	612	603	85
BM/HF 420	4 x 18W	612	603	85
BM/HF 240 (1' x 4')	2 x 36W	1222	298	85
BM/HF 240	2 x 36W	1222	603	85
BM/HF 340	3 x 36W	1222	603	85
BM/HF 440	4 x 36W	1222	603	85