

BSLight




Recessed T-Bar Prismatic Diffused Hinged Frame Fitting (imperial size)



APPLICATION

Mainly used for technical workshop, hospitals, laboratories, food industry, office and supermarket.

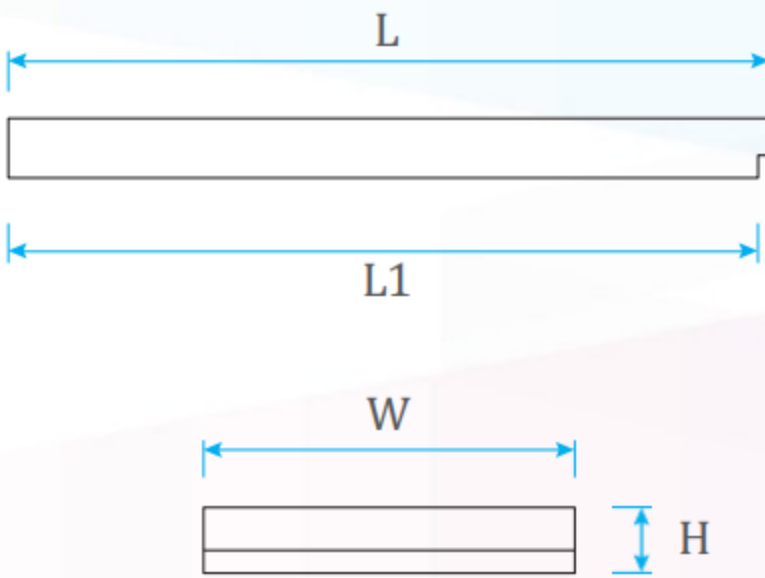

SPECIFICATION

Type	▶ Recessed T-bar prismatic diffused hinged frame fitting (imperial size)
Model/Code	▶ BSC/HF (recessed hinged frame)
Body	▶ High quality gauge sheet steel
Paint work	▶ Fully coated with epoxy powder coated finished
Mounting	▶ Recessed hinged frame
Light source	▶ Fluorescent TLD lamp and T8 LED tube
Lampholder & starterholder	▶ Polycarbonate material
Components	▶ Conventional or Electronic ballast, EL emergency power pack, Fused terminal block

MODEL	NO. OF LAMP	L (mm)	L1 (mm)	W (mm)	H (mm)
BSC/HF 220 (1' x 2')	2 x 18W	612	600	298	85
BSC/HF 220	2 x 18W	612	600	605	85
BSC/HF 320	3 x 18W	612	600	605	85
BSC/HF 420	4 x 18W	612	600	605	85
BSC/HF 240 (1' x 4')	2 x 36W	1222	1210	298	85
BSC/HF 240	2 x 36W	1222	1210	605	85
BSC/HF 340	3 x 36W	1222	1210	605	85
BSC/HF 440	4 x 36W	1222	1210	605	85