




Recessed T-Bar Prismatic
Diffused Fitting (metric size)



APPLICATION

Mainly used for general lighting in offices,
hypermarkets, hospitals, complexes.

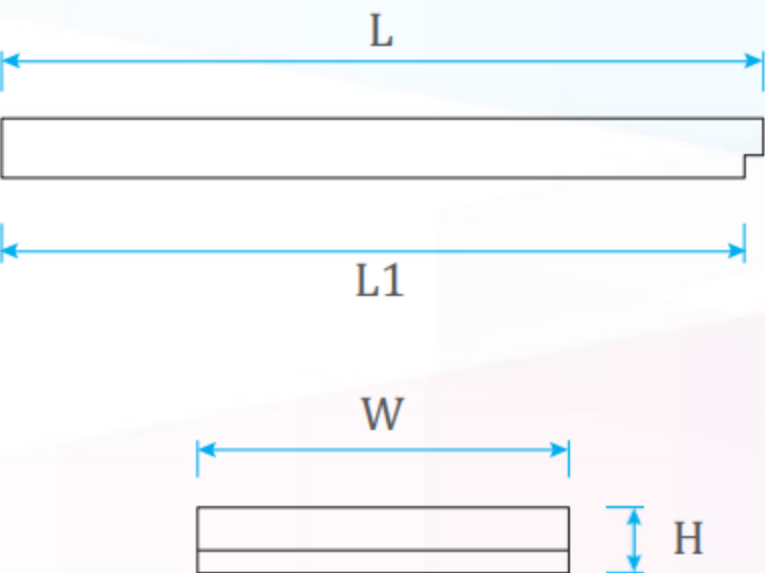

SPECIFICATION

Type	▶ T-bar prismatic diffused fitting (metric size)
Model/Code	▶ BSC/MM
Body	▶ High quality gauge sheet steel
Paint work	▶ Fully coated with epoxy powder coated finished
Mounting	▶ Recessed type
Light source	▶ Fluorescent TLD lamp and T8 LED tube
Lampholder & starterholder	▶ Polycarbonate material
Components	▶ Conventional or Electronic ballast, EL emergency power pack, Fused terminal block

MODEL	NO. OF LAMP	L (mm)	L1 (mm)	W (mm)	H (mm)
BSC 220/MM (1' x 2')	2 x 18W	612	585	295	92
BSC 220/MM	2 x 18W	612	585	595	92
BSC 320/MM	3 x 18W	612	585	595	92
BSC 420/MM	4 x 18W	612	585	595	92
BSC 240/MM (1' x 4')	2 x 36W	1222	1195	295	92
BSC 240/MM	2 x 36W	1222	1195	595	92
BSC 340/MM	3 x 36W	1222	1195	595	92
BSC 440/MM	4 x 36W	1222	1195	595	92