

Dimensions (WxDxH):

Technical Parameter

795×204×457 (mm) **Motor Power:**

260W **Maximum Airflow rating:**


Max Static Pressure: 950Pa

Noise: 44dB(A)

Features

- "CFT" smooth air duct
- BLDC inverter motor
- "4D Fresh" oil fume filtering
- 360° coverage noise reduction
- 18cm ultra-slim body
- "Wave Hello" gesture control
- Source suction control oil fume
- Relase more cabinet space
- Cool and warm dual color light
- 3 colors can match a kinds of kitchen styles





NEW

Model

RANGE HOOD

A862

Technical Parameter

Dimensions (WxDxH): 895×512×695 (mm)

MotorPower: 220W

Maximum Airflow rating: 2000m3/h

Max Static Pressure: 410Pa

Noise: 54dB(A)


Features

- Dual-cavity & dual-suction design
- Dual-cavity negative-pressure outreach
- Absorbing smokes in all directions
- Dual-core 5.0 system
- Upgrading dismantling and cleaning-free
- Highly-matched engine depth
- 60 seconds delayed shutdown
- Low-noise operation, quiet and considerate
- Rounded corners on both sides of the fuselage



Installation

Installation



Model **Technical Parameter**

(NEW)

Dimensions (WxDxH): 895×513×695 (mm)

Motor Power: 220W

Maximum Airflow rating: 2100m3/h

Max Static Pressure: 410Pa


Noise: 51dB(A)

Features

- Eight-sided suction
- Dual-cavity dual-intake with powerful suction
- Close to the fumes, to prevent fumes from escaping
- "Wave Hello" gesture control 2.0
- Concealed oil filter and large capacity oil cup
- Architecturally design



Installation



RANGE HOOD

A852

Model

Technical Parameter

Dimensions (WxDxH): 895×505×537 (mm)

Motor Power: 200W

Maximum Airflow rating: 1800m³/h

Max Static Pressure: 360Pa


55dB(A)

Features

- 360° tornadic collection and exhaustion of fume
- Non-disassembly and wash free
- A++ filter
- 1 min delay power off function



Installation



RANGE HOOD Noise: A851



Product Size (WxDxH): 895x510x560 (mm)

Technical Parameter

Motor Power:

Air Flow Rate: 1800m³/h

Maximum Static Pressure: 800Pa


Noise: ≤ 56dB(A)

Features

- Ducted or internal recirculated
- Innovatica baffle filter
- 9 speed linear touch control
- BLDC inverter motor
- Premium 304 stainless steel
- Slim design (able to build cabinet)
- Cabinet depth size:280mm









Technical Parameter

Product Size (WxDxH): 895x500x537 (mm)

Motor Power: 220W

Air Flow Rate: 1800m³/h


Maximum Static Pressure: 340Pa

Noise: ≤ 58dB(A)

Features

- Dual Core Absorber 3.0 system
- A++ oil-filter
- 360° tornado smoke suction
- Rounded design
- Head injury protection
- One-minute turn off delay





Model

Technical Parameter

Product Size (WxDxH): 895x504x684 (mm)

Motor Power: 200W

Air Flow Rate: 2150m3/h

Maximum Static Pressure: 800Pa


Noise: ≤ 53dB(A)

Features

- 800Pa max static pressure
- BLDC inverter motor
- Turbo function for stir-fry
- FOC intelligent quick speed control system
- Non-disassembly and wash free



Installation



RANGE HOOD

A837

Model

Technical Parameter

Product Size (WxDxH): 895x504x684 (mm)

Motor Power:

Air Flow Rate: 2010m3/h

Maximum Static Pressure: 430Pa


Noise:

Features

- Deep cavity
- Nano oil-free coating
- Premium grade 304# stainless steel filter
- Non-disassembly and wash free
- One-minute turn off delay



Installation



RANGE HOOD

≤ 57dB(A)

A676

Dimensions (WxDxH):

Technical Parameter

895x410x551 (mm)
Motor Power:

Motor Power: 260W

Maximum Airflow rating: 2100m³/h


Max Static Pressure: 460Pa

Noise: 47dB(A)


Features


- Large suction with the airflow rate up 2100m³/h
- 47dB low noise
- High performance filter with the high efficiency separation of oil and smoke
- Stir fry by wavig your hand
- High performance motor brings 460Pa wind pressure









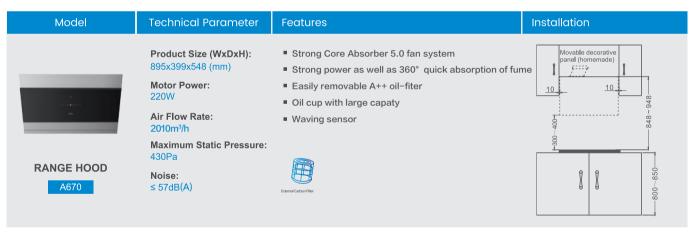





Model

GAS HOB

R397

Product Size(WxDxH): 860x450x160 (mm)

Technical Parameter

Installation Size(WxD): 760x400 (mm)

Heat Flow (kW): 4.5x2, 1.8x1

Flame Failure Device:

Panel:

Tempered Glass


Features

- 4.5kW heat flow rate
- High quality copper burners112 flaming holes with multi-angle makes
- Easy to clean with removable burner
- 8mm tempered glass surface

the fire well-distributed


Flame failure protection






Installation

Model Technical Parameter Features Installation ■ 4.5kW heat flow rate Product Size(WxDxH): 760x450x162 (mm) ■ High quality copper burners Installation Size(WxD): ■ 112 flaming holes with muti angle makes the fire well-distributed Heat Flow (kW): ■ Easy to clean with removable burner ■ 8mm tempered glass surface Flame Failure Device: Flame failure protection YES **GAS HOB** Panel: B928 **Tempered Glass**

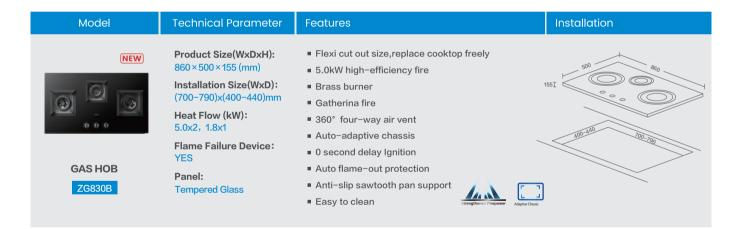

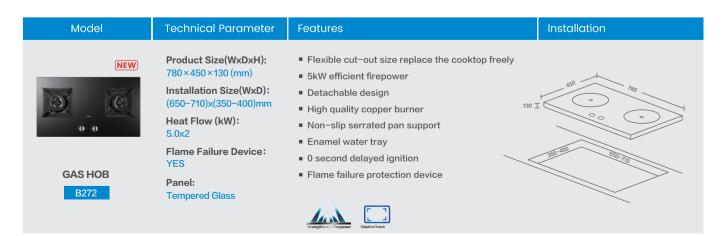



B276

Model

Product Size(WxDxH): 760x450x135 (mm)

Technical Parameter

Installation Size(WxD): 650x350 (mm)

Heat Flow (kW): 4 4x2

Flame Failure Device: YES


Panel:

Tempered Glass

Features

- 44 kW firepower
- Four-ring flame from the inside
- Four sets of oxygen aeration grooves, making cooking more sufficiently
- Flame failure protection








Installation


Model Technical Parameter Features Installation ■ 4.0kW high firepower Product Size(WxDxH): 780x450x138 (mm) ■ Flame failure protection ■ Disassemble burner Installation Size(WxD): 703x403 (mm) ■ Easy-to-clean surface Heat Flow (kW): 4.0x2 Flame Failure Device: YES **GAS HOB** Panel: B920 **Tempered Glass**




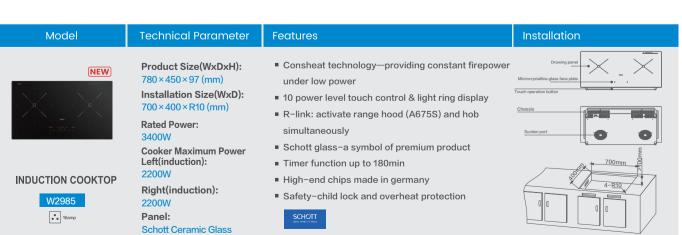


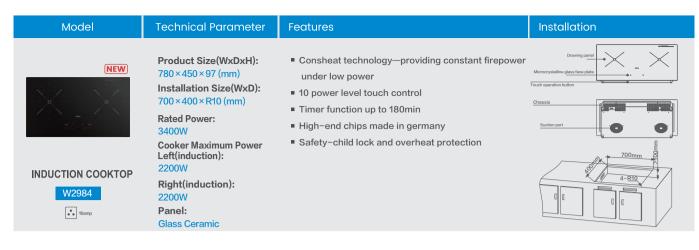


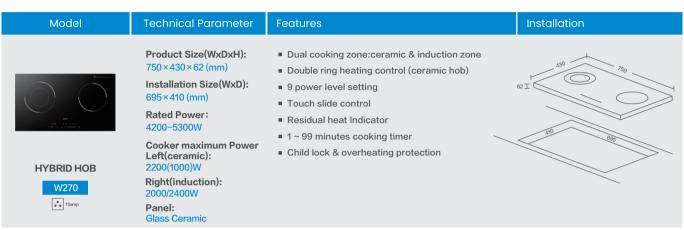


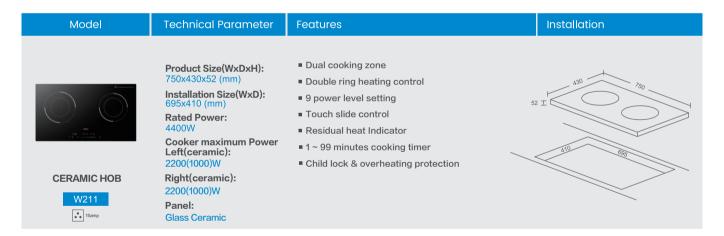


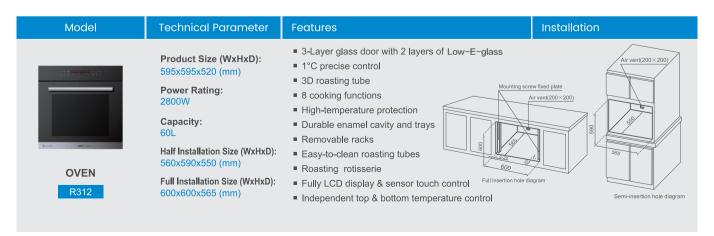

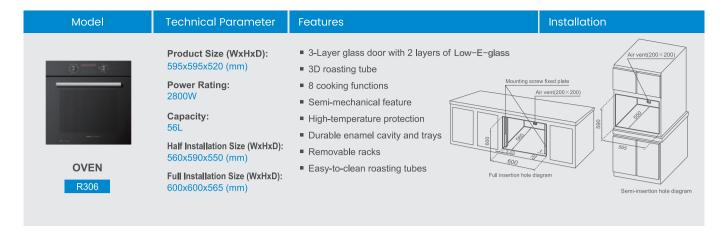

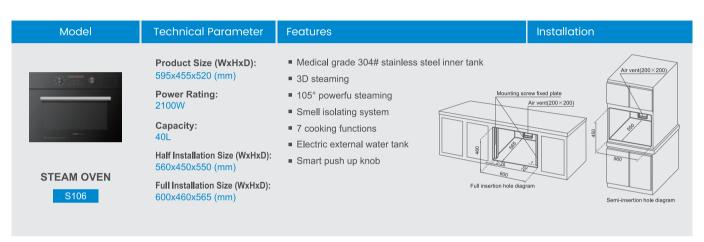

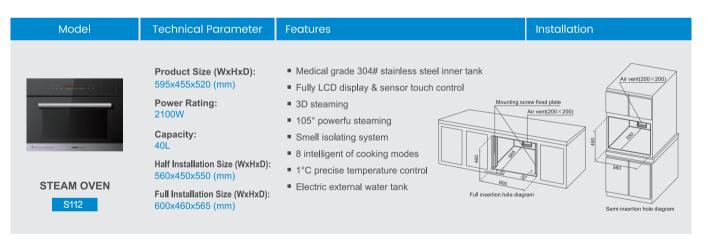

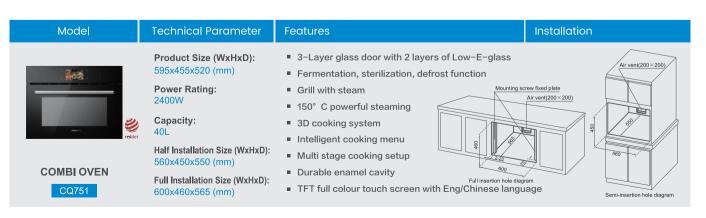





No.1 in global sales for 8 consecutive years





Facebook

SC Alliance (M) SDN BHD

44-2, JALAN PANDAN 3/2, PANDAN JAYA, 55100 CHERAS KUALA LUMPUR. Tel No: +6016-2992236



MANUFACTURER WARRANTY

All Product General Manufacturer Warranty: 2 years Hood Motor Warranty: 10 years Gas Hob Tempered Glass Warranty: Lifetime** Electric Hob (Ceramic Glass) Warranty: 2 years



*Subjective to Terms & Conditions
*Lifetime warranty subject without external factor (human-made).

